



## BHARAT COKING COAL LIMITED ( A SUBSIDIARY OF COAL INDIA LIMITED ) OFFICE OF THE GENERAL MANAGER LODNA AREA

Ref. No:- BCCL/LA/GM/17/ L/17

Dated: 21/4/17

The Director, Ministry of Environment, Forest & Climate Change, Regional Office (ECZ), Bungalow No. A-2, Shyamali Colony, Ranchi-834002

Sub:-Six monthly report on implementation of Environmental Measures for the period from 01<sup>st</sup> Oct, 2016 to 31<sup>st</sup> March ,2017 in respect of Cluster – IX <u>Group of Mines, Lodna</u> Area of BCCL.

Ref. No.: EC Order No - J-11015/307/2010-IA.II(M), dated - 21st May, 2013.

Dear Sir,

Please find enclosed herewith the Six monthly report on implementation of Environmental Measures for the period from 01st Oct, 2016 to 31st March ,2017 in respect of Cluster – IX Group of Mines, Lodna Area of BCCL.

Hope you will find the same in order.

Inclosures: As above with C.D.

Yours faithfully

Lodna Area

Director 1A monitoring cell, Paryavaran Bhawan, CGO Complex, New Delhi-110003.
 General Manager (Env) BCCL, Koyla Bhawan; Dhanbad.

3. General Manager (Min), Lodna Area.

ENVIRONMENTAL CLEARANCE COMPLIANCE OF CLUSTER - IX.

(GRANTED VIDE - J-11015/307/2010-IA.II(M), DATED - 21<sup>ST</sup> MAY, 2013.

(Period - From 01<sup>ST</sup> Oct, 2016 to 31<sup>ST</sup> March, 2017.

ŚI. No	A. Specific conditions by MOEF.	Compliance.			
-	The Maximum production shall not exceed beyond that for which environmental clearance has been granted.	The production from the cluster is within the limit for which environment clearance has been granted.			
:=	Action should be taken to segregate and isolate the fire areas eg. Trench cutting for isolation of fire. Area-wise Action Taken report for extinguishing the fire should be provided.	It is being complied			
	"Mission Mode programme' for extinguishing fire is required wherein scientists and other experts be involved. Any international agency may also be contacted for their expertise in extinguishing the fire in such big area.	It shall be complied. An International expression of Interest has been floated and work shall be awarded after evaluation by technical committee.			
2	The recommendations of Indira Gandhi				
>	Transportation Plan should be submitted to the MOEF.	Master plan phase -ii implementation will be done after 5 years. It shall be complied.			
3	The finalized Mine Closure Plan of Cluster – IX should be submitted to MOEF. The void should be in 30 ha. area with 30 mt. depth.	Mine closure plan as per the guideline of Ministry of coal and on the basis of cluster concept has been prepared by CMPDIL and progressive mine closure plan is being followed.			
7	The road transportation of coal during phase 1 should be by mechanically covered trucks. The road used for coal transportation should be developed with avenue plantation on both sides.	It shall be complied. However transportation of coal is being done by tarpaulin covered trucks at present.			
ij	The company must give priority to capacity building both within the company and to the local youth, who are motivated to carry out the work in future.	It is being done. Training and skill development programs are being conducted by VTCs and HRD of BCCL on regular basis.			
×	Details of transportation, CSR, R&R and implementation of environmental action plan for each of the 17 clusters should be brought out in a booklet from.	It is being complied. The booklet has been prepared for CSR and R&R and also uploaded on CIL website.			
×	A study should be initiated to analyze extent of reduction in pollution load every year by reducing road transport.	This is being done by CMPDIL and final report yet to be submitted.  It shall be complied Presently Master Plan			
×	The expertise available internationally should be utilized for control of fire in Jharia coalfields and for their reclamation and to further minimize time for fire and subsidence control.	It shall be complied. Presently Master Plan Approved by Govt. of India is under implementation for this purpose. An International expression of Interest has been floated and work shall be awarded after evaluation by technical committee.			

ri

Back filling is being done. Reclamation of old dump has been taken up. Plantation at reclaimed old The abandoned pits and voids should be dump has been started. About 16,357 Nos. of backfilled with OB and reclaimed with plants have been planted at Gokul Park in NT-ST plantation and or may be used for till 2016 - 17, Mar, 2017. pisciculture. BCCL may consider setting up a separate management structure for implementing environment policy and socio-economic A full-fledged Environment Department, headed by a HOD (Environment) along with a suitable, qualified multidisciplinary team of executives (30 issues and the capacity building required in Nos.) which includes Environment, Mining, this regard. Excavation, Civil, Survey, Electrical & Mechanical, Forestry disciplines executives and technicians (4 Nos.) has been established. They are also trained in ecological restoration, methods sustainable development, rainwater harvesting methods etc. At the project level, one Executive in each area has also been nominated as Nodal Officer ΞX (Environment) and also entrusted with the responsibility of compliance and observance of the environmental Acts / Laws including environment protection measures. The activities are monitored on regular basis at Area and at Headquarters levels. GM (Environment) at Head quarter level, Co-ordinates with all the Areas and reports to the Director ("echnical) and in turn he reports to the CMD of the company. The team is multidisciplinary and very much motivated under the guidance of company's Director (Technical) and CMD. Further capacity building at both corporate and operating level is being done. The locations of monitoring stations in the Jharla Coalfields should be finalized in Complied. ccnsultation with the Jharkhand State Pollution Control Board. The smoke / dust emission vary from source Tender for conducting source appointment study to source (fuel wood, coal, fly ash from TPPs, for BCCL was floated twice, however, none of the bidders cualified. Therefore, as per MoU "Sustainable Coal Mining in Coal India Ltd" entered between CIL and "EERI, NEERI Nagpur si ica from natural dust, etc.) and a source Apportionment study should get carried out for the entire Jharia Coalfields. was approached for conducting Source Appointment Study of Clusters of BCCL for compliance of EC conditions. The proposal 2 regarding conducting Source Appointment Study has been submitted by NEERI, Presently it has been submitted to CIL for further scrutiny and approval.

1	f	
ivx	I lineralogical composition study should be undertaken on the composition of the uspended particulate matter (PM <sub>10</sub> and PM <sub>2.5</sub> ) in Jharia Coalfields and also quantified. These studies would help ascertain source and extent of air pollution, based on which appropriate mitigative measures could be taken.	for BCCL was floated twice, however, none of the bidders qualified. Therefore, as per MoU "Sustainable Coal Mining In Coal India Ltd" entered between CIL and NEERI, NEERI Nagpur
ii/xx	The proponent shall prepare time-series maps of the Jharia Coalfields through NRSA to monitor and prevent fire problems in the Jharia Coalfields by isothermal mapping / imaging and monitoring temperatures of the coal seams (whether they are close to spontaneous Ignition temperatures) and based on which, areas with potential fire problems shall be identified.	Work order has been issued to NRSC for the work of "Delineation of Surface Coal Fire and associated land Subsidence in Jharia Coal field ,Jharkhand using satellite based remote -sensing techniques".
iii.xx	Measures to prevent ingress of air (Ventilation) in such areas, to prevent restart fresh / spread fires in other areas including in mines of cluster VIII shall be undertaken.	It is being complied.
XiX	Underground mining should be taken up after completion of reclamation of Opencast mine area after 15 Years.	It shall be complied.
×	No mining shall be undertaken where underground fires continue. Measure shall be taken to prevent / check such fire including in old OB dump areas where the fire could start due to presence of coal / shale with sufficient carbon content.	Measure; are being taken to prevent/check fires.
×	The rejects of washerles in Cluster – IX should be sent to FBC based plant.	Coal washery does not exist in this cluster at present.

There shall be no external OB dumps. At the end of the mining there shall be no void and the entire mined out area shall be revegetated. Areas where opencast mining was carried out and completed shall be reclaimed immediately thereafter.

A detailed calendar plan of production with plan for OB dumping and backfilling (for OC Mines) and reclamation and final mine closure plan for each mine of cluster – IX shall be drawn up and implemented.

Action is being taken as specified in EMP. Backfilling of OB is going on with mining. At the end of Mining there shall be no void and area will be re-vegetated and reclaimed.

Calendar Plan has been prepared. Mine closure plan as per the guidelines of Ministry of Coal has been prepared by Central Mine Planning and Design Institute (CMPDI) Progressive mine closure plan is being implemented.

pe

xxiv	The void shall be converted into a water reservoir of a maximum depth of 15-20 m and shall be gently sloped and the upper benches of the reservoir shall be stabilized with plantation and the periphery of the reservoir fenced. The abandoned pits and voids should be backfilled with OB and biologically reclaimed with plantation and or may be used for pisciculture.	It shall be complied. A part of the void will be converted into the water body as specified in EMP.
<b>^</b>	Mining shall be carried out as per statuette from the streams / Nalas flowing within the lease and maintaining a safe distance from the Nalas flowing along the lease boundary. A safety barrier of a minimum 60 m width shall be maintained along Nalas / water bodies. The small water bodies in OC shall be protected to the extent feasible and the embankment proposed along water body shall be strengthened with stone pitching.	It is being followed as per statutes.
j.xxx	Active OB dumps near water bodies and rivers should be rehandled for backfilling abandoned mines voids. However, those which have been biologically reclaimed need not be disturbed.	No active dumps near water bodies exist.
xxviII	Thick green belt shall be developed along undisturbed areas, mine boundary and in mine reclamation. During post mining stage, a total of 937.84 hat area would be reclaimed. The total additional area under plantation would be 367.95 hat (189.95) hat abandoned quarry area, 178 hat active quarry area, 104.34 OB dump outside quarry area, 36.49 hat service building / Mine infrastructure area / coal dump etc, 165.88 hat green belt around OCP, 263.22 hat barren area), by panting 2344700 plants at a	
××vii	total cost Rs. 10830.45 lakhs.  The road should be provided with avenue plantation on both side as trees act as sink of	
×	carbon and other pollutant.  Specific mitigative measures identified for the Jharia Coalfields in the Environmental Action plan prepared for Dhanbad as a critically polluted area and relevant for Cluster IX shall be Implemented.	It shall be compiled. Dhanbad Action Plan is being implemented. The salient actions of this cluster

The locations of monitoring stations in the The locations of monitoring stations have been Jharla Coalfields should be finalized in finalized with the Jharkhand State Pollution consultation with the Jharkhand State Pollution Control Board. The committee Control Board. The work of monitoring of ambient environment stated that smoke / dust emission very from had been started by Central Institute of Mining & source to source (fuel wood, coal, fly ash Fuel Research (CIMFR), Dhanbad which is having from TPPs silica from natural dust, etc) and a CSIR Laboratory recognized under the EP Rules. source Apportionment Study should be got CMPDIL is now on work. carried out the entire Jharia Coalfields. Mineralogical composition study should be undertaken on the composition for suspended particulate matter (PM 10 and PM 2.5) in Jharia coalfields and also qualified. These studies would help ascertain source and extent of the air pollution, based on which appropriate mitigative measures could be taken. No ground water shall be used for the mining It is being compiled and Mine water is being used activities. Additional water required, if any, for the industrial purpose. Further Mine Water is shall be met from mine water or by recycling also utilized for the community and Irrigation / reuse of the water from the existing activities and from rainwater harvesting purpose. 1. Three pressure filters have been installed at measures. South Tisra, North Tisra underground and Jayram Pur colliery for utilization of Mine Water. 2. Rain water Harvesting. Regular monitoring of groundwater level and The work of monitoring was started by Central Institute of Mining & Fuel Research (CIMFR), quality of the study area shall be carried out by establishing a network of existing wells Dhanbad which has CSIR Laboratory, recognized and construction of new peizometers. The under the EP Rules. Presently CMPDIL is monitoring the ground water level. monitoring for quantity shall be done four times a year in pre-monsoon (May), monsoon (August), post-monsoon (November) and winter (January) seasons and for quality including Arsenic and Fluoride during the month of May. Data thus collected shall be The locations of monitoring stations have been finalized. submitted to the Ministry of Environment & Forest and to the Central Pollution Control Board / SPCB quarterly within one month of monitoring. Rainwater harvesting measures shall be undertaken in case monitoring of water table indicates a declining trend. Mine discharge water shall be treated to meet standards prescribed standards before discharge into natural water coursed / agriculture. The quality of the water It is being complied. discharged shall be monitored at the outlet points and proper records maintained thereof and uploaded regularly on the company website. ETP shall also be provided for workshop, and

re

01 no of ETP/Oil grease Trap is in operation.

CHP, if any. Effluents shall be treated to

confirm to prescribed standards in case discharge into the natural water course.

y		
/ AXXX	Regular monitoring of subsidence movement on the surface over and around the working area and impact on natural drainage pattern, water bodies, vegetation, structure, roads, and surroundings shall be continued till movement ceases completely. In case of observation of any high rate of subsidence movement, appropriate effective corrective measures shall be taken to avoid loss of life and material. Cracks shall be effectively plugged with ballast and clayey soil / suitable material.	Complied.
xxxvi	Sufficient coal pillars shall be left un- extracted around the air shaft (within the subsidence influence area) to protect from any damage from subsidence, if any.	Sufficient coal pillars have been left around air shafts as per the statutes and DGMS guidelines.
xxxvi	High root density tree species shall be selected and planted over areas likely to be affected by subsidence.	Identification of high root density plants and their plantation in subsidence prone area will be taken-up.
xxxviii	Depression due to subsidence resulting in water accumulating within the low lying areas shall be filled up or drained out by cutting drains.	It shall be complied.
xxxix	Solid barriers shall be left below the roads falling within the blocks to avoid any damage to the roads.	Sufficient parriers are left for saving the surface installation and infra structures as per the statute and DGMS guidelines.
¥	No depillaring operation shall be carried out below the township / colony.	It is being followed.
ΠX	The transportation plan for conveyor-cum-rail for Cluster-IX should be dovetailed with Jharia Action plan. Road transportation of coal during Phase – 1 should be by mechanically covered trucks, which should be introduced at the earliest. The plan for conveyor-cum-rail for Cluster – IX should be dovetailed with Jharia Action Pan. The road transportation of coal during Phase – 1 should be done by mechanically covered trucks.	Action has been taken for formulating adequate transportation plan for conveyor-cum-rail system of dispatch. CMPDIL has been requested to prepare the plan. Till that time transportation is being done by covering vehicle with tarpaulin cover. Action for mechanically covered trucks has been taker.
Ţ	A study should be initiated to analyze extent of reduction in pollution load every year by reducing road transport.	This is beir 3 done by CMPDIL
Ę	R&R of 12246 Nos. of PAF's involved. They should be rehabilitated at cost of Rs. 126092.027 Lakhs as per the approved Jharia	Implemer tation is being done as per the Master Plan.



Action Plan.

A detailed CSR Action plan shall be prepared for Cluster IX group of mines. Specific activities shall be identified for CSR the budget of RS. 142.55 Lakhs per year @ Rs. 5/T of coal as recurring expenditure. The 391.28 ha. of area within Cluster IX MI existing as waste land and not being acquired shall be put to productive use under CSR and developed with fruit bearing and other useful species for the local communities. In addition to afforesting 1942.12 ha, of area at the post-mining stage, the waste land / barren land within Cluster IX ML. shall be rehabilitated / reclaimed as forest / agricultural land under CSR Plan in consultation with local communities. Third party evaluation shall be got carried out regularly for the proper implementation of activities undertaken in the project area under CSR. Issue raised in the public Hearing shall also be integrated with activities being taken up under CSR. The details of CSR undertaken along with budgetary provisions for the village-wise various activities and expenditure thereon shall be uploaded on the company website every year. The company must give priority to capacity building both within the company and to the company and to the local youth, who are motivated to carry out the work in future.

It shall be complied. BCCL is implementing CSR activities. A separate CSR committee has been formed for this purpose. TISS has conducted the survey for effective and

need based CSR activities implementation. Recommendations of TISS shall be followed. A handloom weaving project (JHARCRAFT) has been started in the area which provides employment to local womenfolk.

For monitoring land use pattern and for post mining land use, a time series of land use maps, based on satellite imagery (on a scale of 1:5000) of the core zone and buffer zone, from the start of the project until end of mine life shall be prepared once in 3years (for any one particular season which is consistent in the time series), and the report submitted to MOEF and Its Regional office at Bhubaneswar.

A final Mines Closure Plan along with details of Corpus Fund shall be submitted to the Ministry of Environment & Forest Restoration Plan of the mine area shall be carried out using a mix of native species found in the original ecosystem, which were conserved insitu and ex-situ in an identified area during mine reclamation and at the post mining stage for habitat restoration.

Complied. Presently a time series map of vegetation cover in the Jharia Coal Field is being carried out through CMPDI Ranchi.

Further CMPDI has been requested to prepare "Time series of Land use maps based on satellite imagery of the core zone and buffer zone in the scale 1:50000 for every 3 years.

Mine closure plan as per the guidelines of Ministry of Coal has been prepared by Central Mine Planning and Design Institute (CMPDI) and progressive mine closure plan is implemented.


separate environmental management cell with suitable qualified personnel shall be set A full-fledged Environment Department, heade up under the control of a Senior Executive, by a HOD (Environment) along with a suitable who will report directly to the Head of the qualified multidisciplinary team of Executives (3 company for implementing environment nos.) which includes Environment, Mining policy and socio-economic issues and the Excavation, Civil, Survey. Electrical & Mechanica capacity building required in this regard. Forestry disciplines Executives and Technicians ( Nos.) has been established. They are also trained in ecological restoration sustainable development rainwater harvesting methods etc. At the projec level, one Executive ir each area has also beer as Project (Environment) and is also entrusted with the responsibility of compliance and observance of the environmental Acts / Laws including environment protection measures. The activities are monitored on regular basis at Area and at Head Quarters levels. GM (Environment) at Head Quarter level Co-ordinates with all the Areas and reports to the Director (Technical) and in turn he reports to the CMD of the company. The team is multidisciplinary and very much motivated under the guidance of company's Director (Technical) and CMD. Further capacity building at both corporate and operating Implementation of final mine closure plan for level is being done. Mine closure plan as per the guidelines of Ministry Cluster IX, subject to obtaining prior approval of Coal has been prepared by Central Mine of the DGMS in regard to mine safety issues. Planning and Design Institute (CMPDIL) and progressive mine clasure plan is implemented. Corporate Environment Responsibility :-The company shall have a well laid down A well-defined Corpora: Environment Policy has Environment Police approved by the Board of already been laid dov. and approved by the Directors. Board of Directors. Tr 3 also posted on BCCL The environment Policy shall prescribe for standard operating process / procedures to bring into focus any infringements / deviation Complied. / violation of the environmental or forest norms / conditions. A hierarchical system of the company to deal with The hierarchical system or Administrative environmental issue from corporate level to mine Order of the company to deal with level already exists. environmental issues and for ensuring compliance with the environmental clearance Being complied. conditions shall be furnished. To have proper checks and balances, the company shall have a well laid down system

le

of reporting of non-compliances / violations of environmental norms to the Board of Directors of the company and / or

shareholders or stakeholders at large.

	3	
	No change in mining technology and scope of work shall be made without prior approval of the history	
	shall be made without prior approval of the Ministry	ing Compliance.
	L SIIVII On Ment and E	
:=	INO Change in the	Being complied.
1	No change in the calendar plan of production quantum of mineral coal shall be made.	for
Con-	Four ambi	Being com III
	Four ambient air quality monitoring stations shall established in the core zone as well as its contract.	Being complied.
	established in the core zone as well as in the buff	be The locations of monitoring statio
	Location of the stationary and NDx monitoring	fer have been finalized.
=	I meteorological date Se decided based on the	ne longine di monitoring of ambie
	environmentally and impographical features ar	d Control
	consultation with the strong sensitive targets	in Posser to Mining & Fu
	Monitoring of heavy matel	d. having CSIR Laborate which
	Letc carried out at least and it as rig, As, Ni, Cd, C	r. linder the FD D interest recognize
	Data on ambient air quality (PM 10, PM 2.5, SO <sub>2</sub> an NO <sub>x</sub> ) and heavy metals such as HC An All (1997).	is carrying out the work of monitoring.
	NO <sub>x</sub> ) and heavy metals such as HG, As, Ni, Cd, Cr an other monitoring data shall be regulated.	d   monitoring.
	other monitoring data shall be regularly submitted the Ministry including its Regional and the Ministry including its Regional	d
	the Ministry including its Regional Office a	0
≥	Bhubaneswar and to the State Pollution Control Board	
	and the Central Pollution Control Board months. Random verification of part once in six	It is being complied.
	months. Random verification of samples through	oching compiled.
	analysis from independent laboratories recognized under the EPA rules, 1986 shall be finally	
	compliance report	
	Adequate measures shall be but	
	levels below 85 dBA in the work environment. Workers engaged in blasting and delivers	A CONTRACTOR OF THE CONTRACTOR
	engaged in blasting and drilling operations, operation of HEMM, etc shall be provided with	
	of HEMM, etc shall be provided with ear plugs / muffs.	Being complied.
	Industrial wastewator (world	in the first and a
	Industrial wastewater (workshop and wastewater from the Mine) shall be properly collected, treated so as to conform to the standards provided to the standards.	The locations of monitoring stations
		I make been malized.
		The work of monitoring of ambient
		elivilolillent has been started by
	great diap stidl be installed before discharge	Central Institute of Mine & Fuel
1	workshop effluents.	Research (CIMFR), Dhanbad which is having Laboratory recognized under
		the EO Rules. CMPDI is currently
		carrying out the work of monitoring the
$\dagger \tau$	/ehicular emission shall be t	ambient environment.
r	/ehicular emission shall be kept under control and	
In	egularly monitored. Vehicles used for transporting the nineral shall be covered with tarpaulins and optimally	It is being complied.
10	paded.	re is being complied.
	donitoring of environment quality parameters shall be	
1 _	arried out through establishment of adequate number	
1		
a	ing type of pollution monitoring and applicate	representation of the second o
a	nd type of pollution monitoring and analysis quipment in consultation with the State Pollution ontrol Board and data got analyzed through a	It is being done.

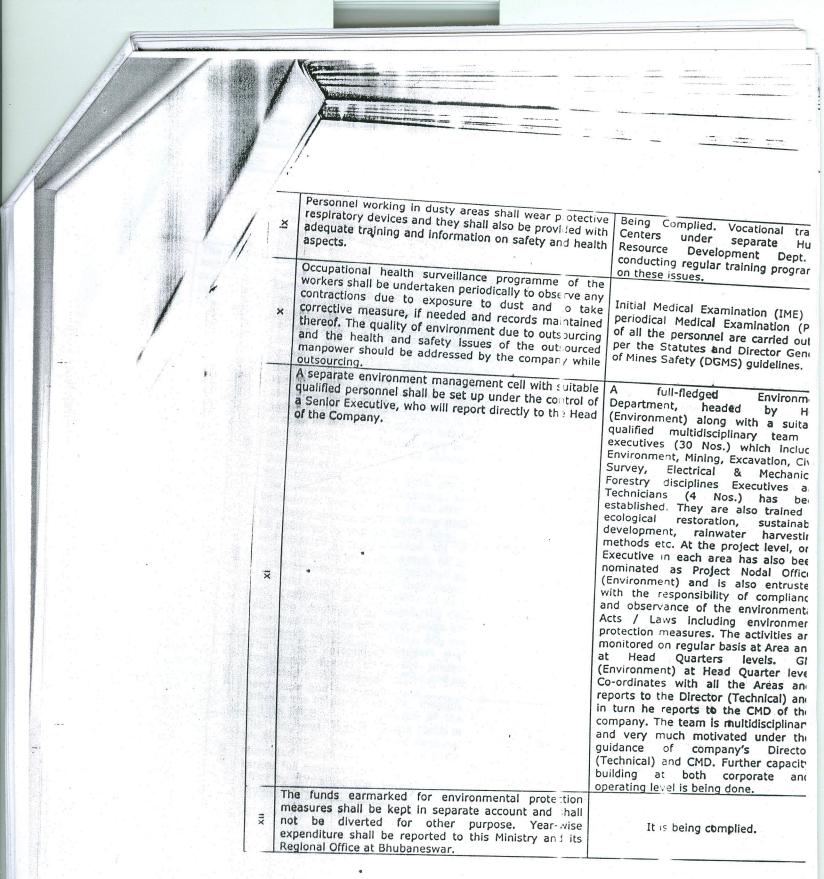

1	The project authorities shall advertise at least in two local newspapers widely circulated around the project, locality concerned within seven days of the clearance letter informing that the project has been accorded environmental clearance and a copy of the clearance letter is available with the State Pollution Control Board and may also be seen at the website of the ministry of A copy of the environmental clearance letter shall be Corporation or University of Corporation or University Panchayat/ZilaParished	It has been complied.
XIX	from whom any suggestion / representation has been received while processing the proposal. A copy of the website.  A copy of the environmental clearance letter to the displayed on compan is	Complied.
×	displayed at the Regional Office District Industry Sect r  The clearages of the Regional Office for 30 days	Complied.
	be uploaded by the project authorities on their websites and updated at least once every six months so as to bring the same in public domain. The monitoring data environmental quality parameter (air, water, noise and soll) and critical pollutant such as PM <sub>10</sub> , PM <sub>2.5</sub> , SO <sub>2</sub> and NO <sub>x</sub> (amblent) and critical sectoral parameters shall also be displayed at the entrance of the project premises and mine office and in corporate office and on the project proposes.	Complied.
h C	The project proponent shall submit six monthly compliance reports on status of compliance of the stipulated environmental clearance conditions (both in lard copy and in e-mail) to the respective Regional office of the Ministry, respective Zonal Offices of CPCB of the SPCB.	Being complied.
st	he Regional Office of this Ministry located at hubaneswar shall monitor compliance of the sipulated conditions. The Project authorities shall stend full cooperation to the Office(s) of the Regional fice by furnishing the requisite data / information / onitoring reports.	Shall be complied.

,

Estatus.		
	The Environment G	
Xix	The Environment Statement for each financial year ending 31 March in for-V is mandated to be submitted by the project proponent for the concerned State Pollution Control Board as prescribed under the Environment (protection) Rules, 1996, as amended subsequently, shall also be uploaded on the company's website along with the status of compliance of EC conditions and shall be sent to the respective Regional Offices of the MOEF by E-mail.	
С	Other Conditions by MOEF:	G. III
-	The Ministry or any other Competent Authority may stipulate any further condition(s) for environmental protection.	Compliance. Agree.
=	Failure to comply with any of the conditions mentioned above may result in withdrawal of this clearance and attract the provisions of the Environment (Protection) Act, 1986.	Agree.
	The above conditions will be enforced inter-alia, under the provisions of the Water (Prevention & Control of Pollution) Act, 1974, the Air (prevention & Control of Pollution) Act, 1981, the Environment (Protection) Act, 1986 and the Public Liability Insurance Act 1991 along with their amendments and Rules. the proponent shall ensure to undertake and provide for the costs incurred for taking up remedial measures in case of soil contamination, contamination of groundwater and surface water, and occupational and other diseases due to the mining operations.	It is being complied.
2	The Environmental clearance is subject to the outcome of the Writ Petition filed by M/s Bharat Coking Coal Limited (BCCL) in response to the closure orders issued by the Jharkhand State Pollution Control Board which is pending in the Jharkhand High Court.	Agree.

Lodna Area
BCCL. Dhanbad

## STRICTLY RESTRICTED FOR COMPANY USE ONLY RESTRICTED

The information given in this report is not to be communicated either directly or indirectly to the press or to any person not holding an official position in the CIL / GOVERNMENT.

## ENVIRONMENTAL MONITORING REPORT OF BHARAT COKING COAL LIMITED, CLUSTER – IX

(FOR THE Q.E. DECEMBER, 2016)

E. C. no. J-11015/307/2010-IA.II (M) dated 21.05.2013-

March, 2017



# **CLUSTER - IX**

(FOR THE Q.E.December, 2016)

# **CONTENTS**

SL. NO.	CHAPTER	PARTICULARS	PAGE NO.
1.		EXECUTIVE SUMMARY	1-2
2.	CHAPTER - I	INTRODUCTION	3-4
3.	CHAPTER-II	AMBIENT AIR SAMPLING & ANALYSIS	5-13
4.	CHAPTER-III	WATER SAMPLING & ANALYSIS	14-19
5.	CHAPTER-IV	NOISE SAMPLING & ANALYSIS	20-24
6.	Plates: Plate. NO I	SURFACE PLAN SHOWING AIR/NOISE MONITORING STATIONS	25
	Plate. NO II	SURFACE PLAN SHOWING WATER MONITORING LOCATIONS	26

# STRICTLY RESTRICTED FOR COMPANY USE ONLY RESTRICTED

The information given in this report is not to be communicated either directly or indirectly to the press or to any person not holding an official position in the CIL / GOVERNMENT.


## ENVIRONMENTAL MONITORING REPORT OF BHARAT COKING COAL LIMITED CLUSTER – IX

(FOR THE Q.E. DECEMBER, 2016)

E. C. no. J-11015/307/2010-IA.II (M) dated 21.05.2013-

March, 2017





## **EXECUTIVE SUMMARY**

#### 1.0 Introduction

The purpose of environmental monitoring is to assess the quality of various attributes that affects the fauna and flora. In accordance with the quality of these attributes appropriate strategy is to be developed to control the pollution level within the permissible limits. The three major attributes are air, water and noise level.

Bharat Coking Coal Limited (BCCL), a Subsidiary company of Coal India Limited is operating Underground and Opencast Mines in Jharia Coalfield (JCF) is a part of Gondwana Coalfields located in Dhanbad district of Jharkhand, the JCF is bounded by 23°37' N to 23°52' N latitudes and 86°09' E to 86°30' E longitude occupying an area of 450 Sq.km. BCCL has awarded Environmental monitoring work of Jharia Coalfield (JCF) to Central Mine Planning & Design Institute Limited (CMPDIL). The environmental monitoring has been carried out as per the conditions laid down by the MoEFCC while granting environmental clearance of project, consent letter issued by the respective SPCB, and other statutory requirements.

## 2.0 Sampling location and rationale

### 2.1 Ambient air sampling locations

The ambient air quality monitoring stations were selected to represent core, buffer zone area. The rationale has been based on the guidelines stipulated by MoEF&CC, consent letter of SPCB, as well as other statutory requirements.

## 2.2 Water sampling stations

The Water sampling stations were selected for mine sump water, drinking water supply, well/ Hand pump water also surface water samples.

## 2.3 Noise level monitoring locations

Noise levels vary depending on the various activities in mining areas. The monitoring of noise level in different locations will be helpful to take appropriate mitigating measures. The noise levels were recorded in mining area, washery and in residential area.

## 3.0 Methodology of sampling and analysis

## 3.1 Ambient air quality

Parameters chosen for assessment of ambient air quality were Particulate Matter (PM $_{10}$ ), Fine Particulate Matter (PM $_{2.5}$ ), Sulphur Di-oxide (SO $_2$ ) and Nitrogen Oxides (NO $_X$ ). Respirable Dust Samplers (RDS) and Fine Dust Sampler (PM $_{2.5}$  sampler) were used for sampling of PM $_{10}$ , SO $_2$ , & NO $_X$  and Fine Dust Sampler (PM $_{2.5}$  sampler) were used for sampling of PM $_{2.5}$  at 24 hours interval once in a fortnight and the same for the gaseous pollutants. The samples were analysed in Environmental Laboratory of CMPDI, RI-I, Asansol.

## 3.2 Water quality

Water samples were collected as per standard practice. The effluent samples were collected and analysed for four parameters on fortnightly basis. The drinking and Surface water samples were collected and analysed for 25 and 17 parameters respectively, on quarterly basis. Thereafter the samples were preserved and analysed at the Environmental Laboratory at CMPDI (HQ), Ranchi.

## 3.3 Noise level monitoring

Noise level measurements in form of 'LEQ' were taken using Integrated Data Logging Sound Level Meter. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB(A).

## 4.0 Results and interpretations

### 4.1 Air quality

It has been seen from the analysis results that the 24 hours average concentration parameters like  $PM_{10}$ ,  $PM_{2.5}$ ,  $SO_2$  and  $NO_X$  are mostly within the permissible limits in all sampling locations as per MoEFCC Gazette Notification No. GSR 742(E) dt 25.09.2000 Standards for Coal Mines and National Ambient Air Quality Standard -2009. Sometimes the concentration of SPM,  $PM_{10}$  &  $PM_{2.5}$  exceeds the limits due to heavy public traffic, poor road condition, coke oven plants, burning of coal by surrounding habitants, brick making, municipal waste dumps and industries like Steel Plant, thermal Plants including their fly ash etc.

## 4.2 Water quality

The test results indicate that the major parameters compared with MoEF&CC Gazette Notification No. GSR 742(E) dt 25.09.2000 Standards for Coal Mines, IS.10500/2012 (Drinking water) and IS: 2296 (Surface water), are with in permissible limits.

#### 4.3 Noise Level

During the noise level survey it has been observed that the noise level in the sampling locations is within the permissible limits prescribed as per MoEF&CC Gazette Notification No. GSR 742(E) dt 25.09.2000 Standards for Coal Mines for Industrial Area and Noise pollution (Regulation and Control) Rules, 2000.

### **CHAPTER - I**

## INTRODUCTION

1.0 Any industry and development activities including coal mining is bound to affect environmental attributes. There are positive as well as negative impacts of such operations. For controlling the adverse impacts a regular monitoring is essential. The environmental monitoring is being done as per the guide-lines stipulated by Ministry of Environment, Forest and Climate Change (MoEF&CC), Govt. of India.

The very purpose of environmental monitoring is to assess the quality of various attributes which affects the environment. As per quality of these attributes appropriate strategy is to be developed to control the pollution level within the permissible limits. The three major attributes are air, water and noise level.

Bharat Coking Coal Limited (BCCL), a subsidiary company of Coal India Limited (CIL) is operating UG Mines and Opencast Mines in Jharia Coalfield (JCF). The Jharia Coalfield (JCF) having an area of 450 Sq.KM.

Bharat Coking Coal has awarded Environmental Monitoring work of all Projects, Cluster wise, to Central Mine Planning & Design Institute Limited (CMPDIL). The environmental monitoring has been carried out as per conditions laid down by MoEF&CC while granting environmental clearance to different projects. CMPDI has trained manpower and well equipped laboratory to carry out monitoring, analysis and R&D work in the field of environment.

- 1.1 The Cluster-IX is in the Eastern part of the Jharia coalfield. It includes a group of 7 Mines (viz. Lodna, S. Tisra/NTST OC, Jealgora, Joyrampur, Jeenagora, Bararee, S.Tisra/NTST Expan. OC. The Cluster IX is situated about 25 30 kms from Dhanbad Railway Station. The mines of this Cluster IX are operating since pre nationalization period (prior to 1972-73). It is connected by both Railway and Road. The drainage pattern of the area is governed by Kashi Jore.
- 1.2 The Cluster-IX is designed to produce 6.548 MTPA (normative) and 8.512 MTPA (peak) capacity of coal.

The Project has Environmental Clearance from Ministry of Environment, Forest and Climate Change (MoEF&CC) for a rated capacity 6.548 MTPA (normative) and 8.512 MTPA (peak) capacity of coal production vide letter no. J-11015/307/2010-IA.II (M) dated 21st May, 2013.

Ministry of Environment, Forest and Climate Change while granting environmental clearance has given one of the General conditions that "Four ambient air quality monitoring stations should be established in the core zone as well as in the buffer zone for PM<sub>10</sub>, PM<sub>2.5</sub>, SO<sub>2</sub>, NOx monitoring. Location of the stations should be decided based on the meteorological data, topographical features and environmentally and ecologically sensitive targets in consultation with the State Pollution Control Board." And other conditions regarding water / effluent and noise level monitoring.

In compliance of these & report prepared for authorities.	e conditions the E or submission to	invironmental MoEF&CC	Monitoring & SPCB	has been of and other	carried out statutory
			•••••		•••••

#### **CHAPTER-II**

## AMBIENT AIR QUALITY MONITORING

2.1 Location of sampling station and their rationale:

(as per G.S.R. 742 (E) dt. 25th December,2000)

## 2.1.1 Ambient Air Quality Sampling Locations

## I. CORE ZONE Monitoring Location

## i) Jeenagora (A13) : Industrial Area

The location of the sampling station is 23° 42. 536' N & 86° 24. 664' E. The sampler was placed at 1.5 m above the ground level of Safety Office. The station was selected to represent the impact of mining activities of Lodna area, poor roads condition, heavy public traffic, burning of coal by the surrounding habitants

## II. BUFFER ZONE Monitoring Location

## i) Bhowrah North (A14): Industrial Area

The location of the sampling station is 23°40.977' N 086°23.963'E. The sampler was placed at 1.5 m above the ground level of Project Office.

## ii) Hurriladih UGP (A28) : Industrial Area

The location of the sampling station is 23°44′ 65" N & 86° 24. 101'E. The sampler was placed at 1.5 m above the ground level of Safety office.

## 2.2 Methodology of sampling and analysis

Parameters chosen for assessment of ambient air quality were Particulate Matter ( $PM_{10}$ ), Particulate Matter ( $PM_{2.5}$ ), Sulphur di-oxide ( $SO_2$ ) and Nitrogen oxides ( $NO_X$ ). Respirable Dust Samplers (RDS) & fine particulates for  $PM_{2.5}$  sampler were used for sampling  $PM_{10}$  &  $PM_{2.5}$  respectively at 24 hours interval once in a fortnight and the same for the gaseous pollutants. The samples were analyzed in Environmental Laboratory of CMPDI, RI-I, Asansol.

#### 2.3 Results & Interpretations

The results of Ambient Air Quality are presented in tabular form along with Bar chart for each monitoring station. The interpretations of different parameters are given below:

## 2.3.1 Ambient air quality

#### Particulate Matter PM<sub>10</sub>

In **core zone** under **Industrial area** varies from 88 to 90  $\mu$ g/m<sup>3</sup> In **buffer zone** in **Industrial area** varies from 82 to 102  $\mu$ g/m<sup>3</sup>

#### Particulate Matter PM<sub>2.5</sub>

In **core zone** under **Industrial area** varies from 32 to 55  $\mu$ g/m<sup>3</sup> In **buffer zone** in **Industrial area** varies from 34 to 55  $\mu$ g/m<sup>3</sup>

## **Sulphur Dioxide:**

In **core zone** under **Industrial area** varies from 10 to 11  $\mu$ g/m<sup>3</sup> In **buffer zone** in **Industrial area** varies 12  $\mu$ g/m<sup>3</sup>

## **Oxides of Nitrogen:**

In **core zone** under **Industrial area** varies from 23 to 27 µg/m<sup>3</sup> In **buffer zone** in **Industrial area** varies from 26 to 29 µg/m<sup>3</sup>

## **AMBIENT AIR QUALITY DATA**

Name of the Company: Bharat Coking Coal limited Year : 2016-17.


Name of the Cluster - IX Q.E.: December 2016

Station Code/Name: (a) A13 Jeenagora Category: Industrial.

**ZONE:** Core

(a). Station Code/Name: A13 – Jeenagora, Category: Industrial<sup>1</sup>.

	(17)				
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	15 - Nov -16	88	32	11	23
2	27 - Dec - 16	90	55	<10	27
	NAAQ Standards	100	60	80	80

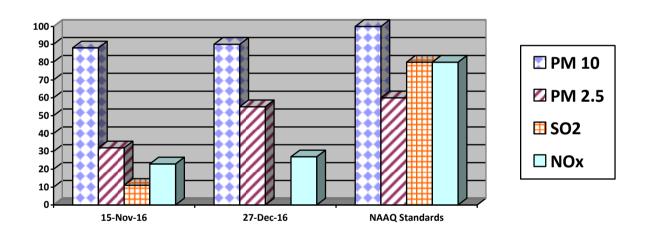

#### Note:

- > All values are expressed in microgram per cubic meter.
- > 24 hours duration

<sup>1</sup> Report released by Shri Indranil De, Manager (Env), CMPDI, RI-1, Asansol, Signed......Date 22.02.2017. Job No. 110310

## **AMBIENT AIR QUALITY DATA**

Name of the Company: **Bharat Coking Coal limited**Year : **2016-17.**Name of the Cluster : **Cluster – IX**Q.E.: **December.** 


2016

Station Code/Name: (a) A14 Bhowrah North Category:

(b) A28 Hurriladih UGP Industrial.
ZONE: BUFFER

(a). Station Code/Name: A14 Bhowrah North, Category: Industrial<sup>2</sup>.

SI. No.	Dates of sampling	PM 10	PM 2.5	SO <sub>2</sub>	NO <sub>X</sub>
1	14 - Oct - 16	102	48	12	27
2	22 - Dec -16	97	55	12	29
	NAAQ Standards	100	60	80	80

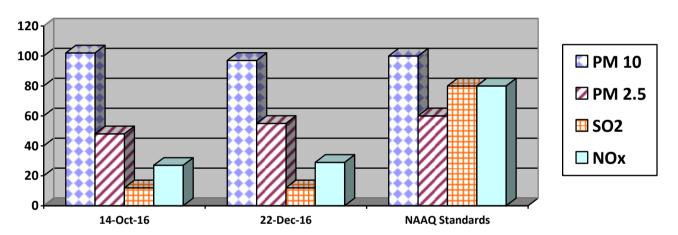


## Note:

- > All values are expressed in microgram per cubic meter.
- > 24 hours duration

<sup>2</sup> Report released by Shri Indranil De, Manager (Env), CMPDI, RI-1, Asansol, Signed......Date 22.02.2017. Job No. 110310

## (b). Station Code/Name: A28 - Hurriladih UGP, Category: Industrial<sup>3</sup>.

SI. No.	Dates of sampling	PM 10	PM 2.5	SO <sub>2</sub>	NO <sub>X</sub>
1	14 - Nov -16	82	34	12	26
	NAAQ Standards	100	60	80	80

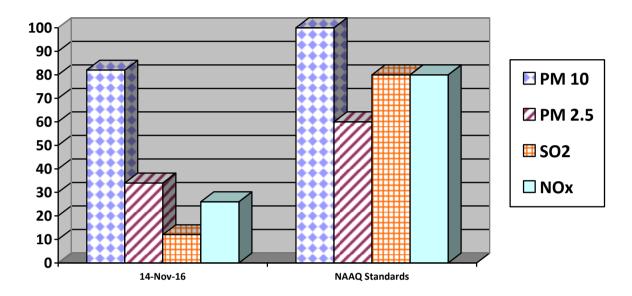


## Note:

- > All values are expressed in microgram per cubic meter.
- > 24 hours duration

<sup>&</sup>lt;sup>3</sup> Report released by Shri Indranil De, Manager (Env), CMPDI, RI-1, Asansol, Signed......Dated 22.02.2017. Job No. 110310

# Ambient Air Monitoring Stations in Cluster- IX in Core & Buffer Zones

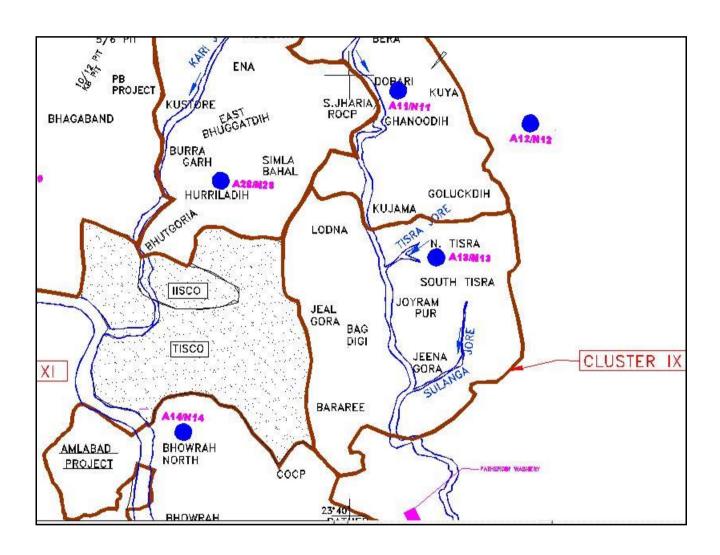

# Ambient Air Quality Standards for Jharia Coal Field As per the Environment (Protection) Amendment Rules, 2000 notified vide notification G.S.R. 742(E), dated 25.9.2000.

Category	Pollutant	Time weighted average	Concentration in Ambient Air	Method of Measurement
1	2	3	4	5
Coal mines located in the coal fields of  Jharia Raniganj Bokaro	Suspended Particulate Matter (SPM)	Annual Average * 24 hours **	500 μg/m <sup>3</sup> 700 μg/m <sup>3</sup>	- High Volume Sampling (Average flow rate not less than 1.1 m³/minute)
• bokaro	Respirable Particulate Matter (size less than 10 µm) (RPM)	Annual Average * 24 hours	250 μg/m <sup>3</sup> 300 μg/m <sup>3</sup>	Respirable Particulate Matter sampling and analysis
	Sulphur Dioxide (SO <sub>2</sub> )	Annual Average * 24 hours	80 μg/m <sup>3</sup> 120 μg/m <sup>3</sup>	1.Improved west and Gaeke method 2.Ultraviolet fluorescene
	Oxide of Nitrogen as NO <sub>2</sub>	Annual Average * 24 hours **	$80 \mu g/m^3$ $120 \mu g/m^3$	1. Jacob & Hochheiser Modified (Na- Arsenic) Method 2. Gas phase Chemilumine- scence

#### Note:

<sup>\*</sup> Annual Arithmetic mean for the measurements taken in a year, following the guidelines for frequency of sampling laid down in clause 2.

<sup>\*\* 24</sup> hourly / 8 hourly values shall be met 92% of the time in a year. However, 8% of the time it may exceed but not on two consecutive days.

#### NATIONAL AMBIENT AIR QUALITY STANDARDS

New Delhi the 18th November 2009

In exercise of the powers conferred by Sub-section (2) (h) of section 16 of the Air (Prevention and Control of Pollution) Act, 1981 (Act No. 14 of 1981), and in supersession of the notification No(s).S.O.384(E), dated 11<sup>th</sup> April 1994 and S.O.935(E), dated 14<sup>th</sup> October 1998, the Central Pollution Control Board hereby notify the National Ambient Air Quality Standards with immediate effect

Pollutant   Average   Industrial, Residential, Residential, Rural and other Areas   Government		Time Concentration in Ambient Weighted Air			Methods of Measurement	
μg/m³		•	Residenti al, Rural and other	Sensitive Area (Notified by Central		
μg/m³   24 Hours **   80   80   (NaOH-NaAsO₂) Method - Gas Phase Chemiluminescence		24 Hours **			Method	
Less than 10μm  or PM <sub>10</sub> , μg/m³					(NaOH-NaAsO <sub>2</sub> ) Method -Gas Phase	
Less than 2.5μm) or PM <sub>2.5</sub> , μg/m³	less than 10µm) or PM <sub>10</sub> ,	24 Hours **			-TEOM	
Lead (Pb) , μg/m³  Annual * 24 Hours ***  1.0  Annual * 24 Hours ***  1.0  Carbon Monoxide (CO), mg/m³  Ammonia (NH₃), μg/m³  Annual * 24 Hours **  100  Annual * 20 Thom is persive Infrared (NDIR)  Spectroscopy  Annual * 400  Annual * 400  Benzene (C₆H₆), μg/m³  Annual *  Annual *  Annual *  Of  Annual *  Of	less than 2.5μm) or PM <sub>2.5</sub> , μg/m <sup>3</sup>				-TEOM	
24 Hours **  1.0  1.0  sampling on EPM 2000 or equivalent filter paper -ED-XRF using Teflon filter  Carbon Monoxide (CO), mg/m³  Ammonia (NH₃), μg/m³  Annual *  24 Hours **  100  100  Chemilluminescence -Indophenol blue method  -Indophenol blue	Ozone (O <sub>3</sub> ) , μg/m <sup>3</sup>				-Chemiluminescence	
Carbon Monoxide (CO), mg/m³8 Hours ** 1 Hour **02 0402 04-Non dispersive Infrared (NDIR) SpectroscopyAmmonia (NH₃), μg/m³Annual * 24 Hours **100 400100 400-Chemiluminescence -Indophenol blue methodBenzene (C₀H₆), μg/m³Annual *0505-Gas Chromatography (GC) based continuous analyzer -Adsorption and desorption followed by GC analysisBenzo(a)Pyrene (BaP) Particulate phase only, ng/m³Annual *0101-Solvent extraction followed byHPLC/GC analysisArsenic (As), ng/m³Annual *0606-AAS/ICP Method after sampling on EPM 2000 or equivalent filter paperNickel (Ni), ng/m³Annual *2020-AAS/ICP Method after sampling on EPM 2000 or equivalent filter paper	Lead (Pb) , µg/m³				sampling on EPM 2000 or equivalent filter paper	
Benzene (C <sub>6</sub> H <sub>6</sub> ), μg/m³  Annual *  O5  O5  Gas Chromatography (GC) based continuous analyzer -Adsorption and desorption followed by GC analysis  Benzo(a)Pyrene (BaP) Particulate phase only, ng/m³  Arsenic (As), ng/m³  Annual *  O6  O6  -AAS/ICP Method after sampling on EPM 2000 or equivalent filter paper  Nickel (Ni), ng/m³  Annual *  O5  O5  -Gas Chromatography (GC) based continuous analyzer -Adsorption and desorption followed by GC analysis  -Solvent extraction followed by HPLC/GC analysis  -AAS/ICP Method after sampling on EPM 2000 or equivalent filter paper					-Non dispersive Infrared (NDIR)	
based continuous analyzer -Adsorption and desorption followed by GC analysis  Benzo(a)Pyrene (BaP) Particulate phase only, ng/m³ Arsenic (As), ng/m³ Annual *  06  06  -AAS/ICP Method after sampling on EPM 2000 or equivalent filter paper  Nickel (Ni), ng/m³ Annual *  20  20  -AAS/ICP Method after sampling on EPM 2000 or	Ammonia (NH <sub>3</sub> ), μg/m <sup>3</sup>					
Particulate phase only, ng/m³ byHPLC/GC analysis  Arsenic (As), ng/m³ Annual * 06 06 -AAS/ICP Method after sampling on EPM 2000 or equivalent filter paper  Nickel (Ni), ng/m³ Annual * 20 20 -AAS/ICP Method after sampling on EPM 2000 or	Benzene (C <sub>6</sub> H <sub>6</sub> ), μg/m <sup>3</sup>		05	05	based continuous analyzer -Adsorption and desorption followed by GC analysis	
Sampling on EPM 2000 or equivalent filter paper  Nickel (Ni), ng/m³  Annual * 20 20 -AAS/ICP Method after sampling on EPM 2000 or	Particulate phase only, ng/m³				byHPLC/GC analysis	
Nickel (Ni), ng/m³ Annual * 20 20 -AAS/ICP Method after sampling on EPM 2000 or	Arsenic (As), ng/m <sup>3</sup>	Annual *	06	06	sampling on EPM 2000 or	
	Nickel (Ni), ng/m <sup>3</sup>	Annual *	20	20	-AAS/ICP Method after	

<sup>\*</sup> Annual Arithmetic mean of minimum 104 measurements in a year at a particular site taken twice a week 24 hourly at uniform intervals.

\*\* 24 hourly or 8 hourly or 1 hourly monitored values, as applicable, shall be complied with 98% of the time in a year. 2% of the time, they may exceed the limits but not on two consecutive days of monitoring.

**NOTE:** Whenever and wherever monitoring results on two consecutive days of monitoring exceed the limits specified above for the respective category, it shall be considered adequate reason to institute regular or continuous monitoring and further investigations.

#### **CHAPTER - III**

## WATER QUALITY MONITORING

## 3.1 Location of sampling sites

(Refer Plate No. - II)

### i) Mine Discharge of Jeenagora (MW9)

A sampling point is fixed to assess the effluent quality of Mine discharge. This location is selected to monitor effluent discharge in to Kashi jore.

- ii) Drinking Water quality at Lodna (GW9)
- iii) Surface Water quality at U/S of Kashi Jore (SW19)
- iv) Surface quality at **D/S of Kashi Jore (SW20)**

## 3.2 Methodology of sampling and analysis

Water samples were collected as per standard practice. The effluent samples were collected and analysed for four parameters on fortnightly basis. The drinking and Surface water samples were collected and analyzed for 25 and 17 parameters on quarterly basis at the Environmental Laboratory at CMPDI (HQ), Ranchi.

## 3.3 Results & Interpretations

The results are given in tabular form along with the applicable standards. Results are compared with Schedule - VI, effluent prescribed by MoEF&CC. Results show that most of the parmeters are within the permissible limits.

## **WATER QUALITY DATA**

(EFFLUENT WATER-FOUR PARAMETERS)

Name of the Company: Bharat Coking Coal Year: 2016-17.

Limited

Name of the Cluster: Cluster - IX Month: October, 2016.

Name of the Stations & Code : 1. MW9- Mine Discharge of

Jeenagora

## **First Fortnight**

SI.		MW9	As per MOEF General
No.	Parameters	(Mine Discharge)	Standards for schedule VI
		14.10.2016	
1	Total Suspended Solids	16	100 (Max)
2	рН	8.23	5.5 - 9.0
3	Oil & Grease	<2.0	10 (Max)
4	COD	20	250 (Max)

## **Second Fortnight**

SI. No.	Parameters	MW9 (Mine Discharge )	As per MOEF General Standards for schedule VI
		19.10.2016	
1	Total Suspended Solids	20	100 (Max)
2	pH	8.35	5.5 - 9.0
3	Oil & Grease	<2.0	10 (Max)
4	COD	26	250 (Max)

\*All values are expressed in mg/lit unless specified.

1 2/3/45 2 - (6021) Analysed By

## **WATER QUALITY DATA**

(EFFLUENT WATER-FOUR PARAMETERS)

Name of the Company: Bharat Coking Coal Year: 2016-17.

Limited

Name of the Cluster: Cluster - IX Month: November, 2016.

Name of the Stations & Code : 1. MW9- Mine Discharge of

Jeenagora

## **First Fortnight**

SI.		MW9	As per MOEF General
No.	Parameters	(Mine Discharge)	Standards for schedule VI
		15.11.2016	
1	Total Suspended Solids	24	100 (Max)
2	рН	8.11	5.5 - 9.0
3	Oil & Grease	<2.0	10 (Max)
4	COD	28	250 (Max)

## **Second Fortnight**

SI. No.	Parameters	MW9 (Mine Discharge)	As per MOEF General Standards for schedule VI
		17.11.2016	
1	Total Suspended Solids	24	100 (Max)
2	рН	8.29	5.5 - 9.0
3	Oil & Grease	<2.0	10 (Max)
4	COD	30	250 (Max)

\*All values are expressed in mg/lit unless specified.

1 2/3/45 2 - 16 0211 Analysed By

## **WATER QUALITY DATA**

(EFFLUENT WATER-FOUR PARAMETERS)

Name of the Company: Bharat Coking Coal Year: 2016-17.

Limited

Name of the Cluster: Cluster - IX Month: December, 2016.

Name of the Stations & Code : 1. MW9- Mine Discharge of

Jeenagora

## **First Fortnight**

SI.		MW9	As per MOEF General
No.	Parameters	(Mine Discharge)	Standards for schedule VI
		07.12.2016	
1	Total Suspended Solids	52	100 (Max)
2	рН	8.43	5.5 - 9.0
3	Oil & Grease	<2.0	10 (Max)
4	COD	36	250 (Max)

## **Second Fortnight**

SI. No.	Parameters	MW9 (Mine Discharge)	As per MOEF General Standards for schedule VI
		27.12.2016	
1	Total Suspended Solids	32	100 (Max)
2	рН	8.34	5.5 - 9.0
3	Oil & Grease	<2.0	10 (Max)
4	COD	32	250 (Max)

\*All values are expressed in mg/lit unless specified.

Analysed By JSA/SA/SSA

Checked By Lab Incharge Env. Lab, RI-2, CMPDI

# WATER QUALITY (SURFACE WATER- ALL PARAMETERS)

Name of the Company: **Bharat Coking** Year: 2016-17.

**Coal Limited** 

Name of the Cluster: Cluster - IX Period: Q. E. December, 2016.

Area: Jeenagora Project: Jeenagora Cluster IX

Stations:
Date of Sampling:
1. Upstream in Kashi Jore SW-19
07/12/2016

 1. Upstream in Kashi Jore SW-19
 07/12/2016

 2. Downstream in Kashi Jore SW-20
 07/12/2016

Sl. No	Parameter	Sampling Stations		Detection Limit	IS:2296 – 1982 (Inland surface water) Class C	BIS Standard & Method
		SW-19	SW-20			
1	Arsenic (as As), mg/l, Max	<0.002	< 0.002	0.002	0.2	IS 3025/37:1988 R : 2003, AAS-VGA
2	BOD (3 days 27°C), mg/l, Max	2.2	2.2	2.00	300	IS 3025 /44: 1993, R : 2003 3 day incubation at 27°C
3	Colour ( Hazen Unit)	colourless	colourless	Qualitative	300	Physical/Qualitative
4	Chlorides (as Cl), mg/l, Max	80	86	2.00	600	IS-3025/32:1988, R-2007, Argentometric
5	Copper (as Cu), mg/l, Max	< 0.03	< 0.03	0.03	1.5	IS 3025 /42 : 1992 R : 2009, AAS-Flame
6	Disolved Oxygen, min.	4.3	3.6	0.10	4	IS 3025/381989, R: 2003, Winkler Azide
7	Fluoride (as F) mg/l, Max	0.68	0.79	0.02	1.5	APHA, 22 <sup>nd</sup> Edition SPADNS
8	Hexavalent Chromium, mg/l, Max	0.018	0.026	0.01	0.05	APHA, 22 <sup>nd</sup> Edition, 1,5 - Diphenylcarbohydrazide
9	Iron (as Fe), mg/l, Max	1.140	1.147	0.06	50	IS 3025 /53 : 2003, R : 2009 , AAS-Flame
10	Lead (as Pb), mg/l, Max	0.053	0.053	0.005	0.1	APHA, 22 <sup>nd</sup> Edition AAS-GTA
11	Nitrate (as NO <sub>3</sub> ), mg/l, Max	44.09	44.70	0.50	50	APHA, 22 <sup>nd</sup> Edition, UV-Spectrphotometric
12	pH value	7.98	8.29	2.5	6.5-8.5	IS-3025/11:1983, R-1996, Electrometric
13	Phenolic compounds (as C <sub>6</sub> H <sub>5</sub> OH), mg/l, Max	< 0.002	< 0.002	0.002	0.0005	APHA, 22 <sup>nd</sup> Edition 4-Amino Antipyrine
14	Selenium (as Se), mg/l, Max	< 0.002	< 0.002	0.002	0.05	APHA, 22 <sup>nd</sup> Edition AAS-GTA
15	Sulphate (as SO <sub>4</sub> ) mg/l, Max	350	320	2.00	400	APHA, 22 <sup>nd</sup> Edition Turbidity
16	Total Dissolved Solids, mg/l, Max	801	797	25.00	1500	IS 3025 /16:1984 R : 2006, Gravimetric
17	Zinc (as Zn), mg/l, Max	< 0.01	< 0.01	0.01	5.0	IS 3025 /49 : 1994, R : 2009, AAS-Flame

\*All values are expressed in mg/lit unless specified.

Analysed By JSA/SA/SSA

Checked By Lab Incharge Env. Lab, RI-2, CMPDI

# WATER QUALITY (DRINKING WATER- ALL PARAMETERS)

Name of the Company: **Bharat Coking** Year: 2016-17.

**Coal Limited** 

Name of the Cluster: Cluster - IX Period: Q. E. December, 2016.

Area: Jeenagora Project: Jeenagora Cluster IX

Stations:
1. Drinking Water from Lodna GW-9

**Date of Sampling:** 07/12/2016

Sl.	Parameter	Sampling Stations		Detection Limit	IS:10500	Standard / Test	
No		GW-9 2 3			Drinking Water Standards	Method	
1	Boron (as B), mg/l, Max	<0.20			0.20	0.5	APHA, 22 <sup>nd</sup> Edition ,Carmine
2	Colour,in Hazen Units	4			1	5	APHA, 22 <sup>nd</sup> Edition ,PtCo. Method
3	Calcium (as Ca), mg/l, Max	56			1.60	75	IS-3025/40:1991, EDTA
4	Chloride (as Cl), mg/l, Max	170			2.00	250	IS-3025/32:1988, R-2007, Argentometric
5	Copper (as Cu), mg/l, Max	< 0.03			0.03	0.05	IS 3025/42 : 1992 R : 2009, AAS-Flame
6	Fluoride (as F) mg/l, Max	0.46			0.02	1.0	APHA, 22 <sup>nd</sup> Edition, SPADNS
7	Free Residual Chlorine, mg/l, Min	0.02			0.02	0.2	APHA, 22 <sup>nd</sup> Edition, DPD
8	Iron (as Fe), mg/l, Max	1.783			0.06	0.3	IS 3025 /53 : 2003, R : 2009 , AAS-Flame
9	Lead (as Pb), mg/l, Max	0.100			0.005	0.01	APHA, 22 <sup>nd</sup> Edition, AAS- GTA
10	Manganese (as Mn), mg/l, Max	0.016			0.02	0.1	IS-3025/59:2006, AAS-Flame
11	Nitrate (as NO <sub>3</sub> ), mg/l, Max	42.0			0.5	45	APHA, 22 <sup>nd</sup> Edition, UV-Spectrphotometric
12	Odour	Agreeable			Qualitative	Agreeable	IS 3025 /05:1983, R-2012, Qualitative
13	pH value	8.11			2.5	6.5 to 8.5	IS-3025/11:1983, R-1996, Electrometric
14	Phenolic compounds (as C <sub>6</sub> H <sub>5</sub> OH), mg/l, Max	< 0.002			0.001	0.001	APHA, 22 <sup>nd</sup> Edition,4-Amino Autipyrine
15	Selenium (as Se), mg/l, Max	< 0.002			0.002	0.01	APHA, 22 <sup>nd</sup> Edition, AAS- GTA
16	Sulphate (as SO <sub>4</sub> ) mg/l, Max	153			2.00	200	APHA, 22 <sup>nd</sup> Edition. Turbidity
17	Taste	Acceptable			Qualitative	Acceptable	APHA, 22 <sup>nd</sup> Edition. Taste
18	Total Alkalinity (c <sub>a</sub> co <sub>3</sub> ),, mg/l, Max	304			4.00	200	IS-3025/23:1986, Titration
19	Total Arsenic (as As), mg/l, Max	< 0.002			0.002	0.01	IS 3025/ 37:1988 R : 2003, AAS-VGA
20	Total Chromium (as Cr), mg/l, Max	0.404			0.04	0.05	IS-3025/52:2003, AAS- Flame
21	Total Dissolved Solids, mg/l, Max	756			25.00	500	IS 3025 /16:1984 R : 2006, Gravimetric
22	Total Hardness (c <sub>a</sub> co <sub>3</sub> ), mg/l, Max	484			4.00	200	IS-3025/21:1983, R-2002, EDTA
23	Turbidity, NTU, Max	1			1.0	1	IS-3025/10:1984 R-1996, Nephelometric
24	Zinc (as Zn), mg/l, Max	0.022			0.01	5.0	IS 3025/ 49 : 1994, R : 2009, AAS-Flame
			-1	I .		/l'1 l	

All values are expressed in mg/lit unless specified.

Analysed By JSA/SA/SSA

Checked By Lab Incharge Env. Lab, RI-2, CMPDI

# CHAPTER - IV NOISE LEVEL QUALITY MONITORING

## 4.1 Location of sampling sites and their rationale

### i) Jeenagora (N13)

To assess the noise level in mine site, the noise levels were recorded in the mine area where all mining activities are in progress.

## ii) Bhowrah North (N14)

To assess the noise level in mine site, the noise levels were recorded in the mine area where all mining activities are in progress.

### iii) Hurriladih UGP (N28)

To assess the noise level in the industrial area, noise levels were recorded during day as well as night time in the colony.

## 4.2 Methodology of sampling and analysis

Noise level measurements in form of 'Leq' were taken using Integrated Data Logging Sound Level Meter (NL-52 OF RION CO. Ltd. Make) during day time. Noise levels were measured for about one hour time in day time. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB (A).

## 4.3 Results & Interpretations

Ambient noise levels were recorded during day time and the observed values were compared with standards prescribed by MoEF&CC.

The results of Noise levels recorded during day time on fortnightly basis are presented in tabular form along with the applicable standard permissible limits. The observed values in terms of  $L_{EQ}$  are presented.

The observed values at all the monitoring locations are found to be within permissible limits.

## **NOISE LEVEL DATA**

Name of the Company: **Bharat Coking** Year: 2016-17.

**Coal Limited** 

Name of the Cluster: Cluster -IX Month: Oct, 2016.

Name of the Stations & Code: 1. Bhowrah North(N14)

## (a) First Fortnight

SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)
1	Bhowrah North (N14)	Industrial area	14.10.2016	58.2	75

<sup>1</sup> Report released by Shri Indranil De, Manager (Env), CMPDI, RI-1, Asansol, Signed......Dated 22.02.2017. Job No. 110310

<sup>\*</sup>Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control )Rules,2000.

<sup>\*</sup> Day Time: 6.00 AM to 10.00 PM.

## **NOISE LEVEL DATA**

Name of the Company: Bharat Coking Year: 2016-17.

**Coal Limited** 

Name of the Cluster: Cluster -IX Month: November, 2016.

Name of the Stations & Code:

1. Jeenagora (N13)
2. Hurriladih UGP (N28)

a. First Fortnight

SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)
1	Jeenagora (N13)	Industrial area	15.11.2016	61.4	75
2	Hurriladih UGP (N28)	Industrial area	14.11.2016	62.4	75

<sup>\*</sup>Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control )Rules,2000.

<sup>\*</sup> Day Time: 6.00 AM to 10.00 PM.

<sup>&</sup>lt;sup>1</sup> Report released by Shri Indranil De, Manager (Env), CMPDI, RI-1, Asansol, Signed......Dated 22.02.2017. Job No. 110310

## **NOISE LEVEL DATA**

Name of the Company: Bharat Coking Year: 2016-17.

**Coal Limited** 

Name of the Cluster: Cluster -IX Month: December, 2016.

Name of the Stations & Code:

1. Jeenagora (N13)
2. Bhowrah North(N14)

## (A) Second Fortnight

SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)
1	Jeenagora (N13)	Industrial	27.12.2016	62.8	75
		area	27.12.2010	02.0	70
2	Bhowrah North	Industrial	22.12.2016	60.3	75
	(N14)	area	22.12.2010	00.3	75

<sup>1</sup> Report released by Shri Indranil De, Manager (Env), CMPDI, RI-1, Asansol, Signed......Dated 22.02.2017. Job No. 110310

<sup>\*</sup>Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control )Rules,2000.

<sup>\*</sup> Day Time: 6.00 AM to 10.00 PM.

## **Noise Level Monitoring Location of Cluster IX**

