

भारत कोकिंग कोल लिमिटेड (एक मिनिरत्न कम्पनी) (कोल इन्डिया लिमिटेड का एक अंग) महाप्रबन्धक का कार्यालय कुसुन्डा क्षेत्र, पो: कुसुन्डा, धनबाद, झारखन्ड

Ref No. BCCL/KA-6/Env./2021/ | 3

Date: 31.05.2021

To,
The Director(s)
Ministry of Environment, Forest and Climate Change (MoEFCC),
(Govt. of India)
Regional Office (ECZ),
Bungalow No. A-2,
Shyamali Colony,
Ranchi - 834002

Sub: Six monthly compliance report on Environmental Clearance Conditions for the period from October'2020 to March'2021 in respect of Cluster-VI Group of mines, EC order no.: EC order no.: J-11015/183/2011-1A.II (M), dated 26-08-2013

Dear Sir,

Enclosed please find herewith six monthly compliance report on environmental clearance conditions for the period from October'2020 to March'2021 in respect of Cluster-VI Group of mines, EC order no.: J-11015/183/2011-1A.II (M), dated 26-08-2013 for your kind perusal.

With regards,

امر اکرہ آ General Manager Kusunda Area, BCCL (Cluster VI)

# **COMPLIANCE OF EC CONDITIONS of CLUSTER-VI**

# EC order no.: J-11015/183/2011-1A.II (M), dated 26-08-2013

|--|

SI. No.	A. Specific Conditions by MOEF:	Compliance
i	The maximum production from the two opencast section in the cluster shall not exceed beyond that for which environmental clearance has been granted.	It is being complied. The production from the cluster is within the limit for which environmental clearance has been granted. Production of last FY is enclosed as Annexure-I.
ii	The two nallahs passing through the mines should be preserved and made functional to drain the water.	It is being complied. Every year, before monsoon the nallas are cleaned to ensure proper drainage of water.
iii	The coal transport to the siding will continue by road to the siding within 2 km with pay loader loading into Rly. Wagons for a period of 5 years by which time the proposed silo in Rly. Siding not being affected in the Jharia Action Plan will be constructed for RLS loading into railway wagons.	It shall be complied. Presently coal transportation has been done by trucks with tarpaulin cover. Covering of truck has been made mandatory in the transportation contract. Picture -1  Avenue Plantation has been done along the roads and it shall be continuously carried out as per availability of space.
iv	As subsidence is on higher side in Godhur colliery, special attention should be given for control and monitoring of subsidence.	It is being complied. Regular subsidence monitoring is being done at underground mines.
V	All old dumps will be filled back in mine voids. At the end of mining there should not be any OBD and should be only one void which shall not exceed 30 m deep.	<ul> <li>It is being complied.</li> <li>Backfilling process in abandoned pits and voids are continuously carried out along with the mining operation. Abandoned Pits will be utilized for Pisciculture in Post Mining Phase.</li> </ul>
vi	An increase in the CSR	It is being complied.  BCCL is implementing CSR activities at various scale. A separate CSR committee has been formed at area level, which is looking after the works being executed under CSR. Kusunda area is constructing 318 toilets in 179 schools in Chaibasa (Swachch Bharat Abhiyan) initiated by Hon'ble Prime Minister of India.
		♣ Under CSR Initiatives, preventive health care of public living in command area has been undertaken extensively through Company as well as State Govt. Self-Protection Kit including Mask, Hand wash, Soap, Detergent etc were provided to needy villagers around the coal mines.
		♣ During pandemic situation, hunger eradication programme were undertaken under CSR/Welfare activities. Dry Food as well as prepared food was distributed among people living in command area.

		The total nos of beneficiary under this programme was around 10000.
vii	Dhanbad Action Plan, as CEPI, be implanted where ever is applicable.	It is Being Complied. Dhanbad Action Plan has been prepared in consultation with Jharkhand State Pollution Control Board for entire BCCL and not cluster wise. It is being implemented comprehensively for all the mines of BCCL including mines of Kusunda Area.
viii	Since the cluster is situated close to Dhanbad, thick green belt and residential areas should be done along the periphery of ML area. Avenue-plantation should be done along the roads which are used for coal transport and measures to arrest coal dust while transporting by covering the trucks and water sprinkling measures etc.	It is being complied. Plantation at de-coaled OB dump area is already being executed for development of green belts as per EC.  Adequate water sprinkling is being done at coal transportation road regularly by mobile water sprinklers, and coal transportation is being done by covering trucks by tarpaulin as measures to control dust pollution. Picture – 1 & 2  At degraded OB dumps at Gondudih Eco-restoration work has been done. Eclosed as Annexure – 3.
ix	Whereas laudable efforts have been made in drawing skill development programmes along with Planning Commission of Gol, all out efforts should be made to ensure that they are suitably employed either with the PP or elsewhere.	It is being complied.  Company is organizing training on regular basis through Vocational Training Centre and Human Resource Department. Annexure – 4.
x	The measure to identify in the Environmental Plan for Cluster- VI groups of mine and the conditions given in this environmental clearance letter shall be dovetailed to the implementation of the Jharia Action Plan.	Master Plan activities are dovetailed with compliance of environmental clearance conditions. The master plan deals with fire control and rehabilitation activities of fire affected areas in the leasehold of BCCL. By implementing complete digging out of fiery seams with water spraying in force as fire control measures air pollution and emission of Green House Gases (GHGs) from the fire affected areas are being prevented. Further rehabilitation of the families from the fire endangered area to the safe places is being taken-up with the help of State Govt. of Jharkhand. The Master plan is being implemented for BCCL as per the prioritization of fire and rehabilitation activities in approved Master Plan. The brief status of Rehabilitation and Fire control measures are enclosed <b>Annexure-5</b> .
xi	The proponent shall prepare time -series maps of the Jharia Coalfields through NRSA to monitor and prevent fire problems in the Jharia Coalfields by Isothermal mapping	It is being complied.  NRSC has been engaged for preparation of time series maps to monitor and prevent fire problems

	/imaging and monitoring temperatures of the coal seams (whether they are close to spontaneous ignition temperatures) and based on which, areas with potential fire problems shall be identified. Measures to prevent ingress of air (Ventilation) in such areas, to prevent restart fresh/spread fires in other areas including in mines of cluster VI shall be undertaken. Expertise available internationally could also be utilized for control of fire in Jharia Coalfields and for their reclamation and to further minimize time for fire and subsidence control. Isothermal mapping using thermal imaging has been got done by NRSA. Measures would be taken to prevent ingress of air (ventilation) in such areas, which may restart fresh fires	of Jharia Coalfield by Isothermal mapping/imaging and monitoring temperatures of the coal seams.  □ NRSC has delineated surface fire and associated land subsidence in Jharia Coalfield using satellite based remote sensing techniques. Latest Report of Jan'2018 by NRSC is enclosed. Enclosed as Annexure-6. Action is being taken as per Jharia Master Plan approved by GOI and State Govt. of Jharkhand. Excavation/ Open Cast mining is being done in the fire/subsidence affected mines to dig out combustible materials to save the coal from burning and to prevent further spread of the fire.  Old UG Workings have been sealed off to prevent ingress of Air in other areas.  Global Expression of Interest had been opened for the international experts/ firms/ consultants/ agencies to deal with coal mine fire in Jharia Coalfield with vision of reclamation, further minimization of spread of fire & subsidence control for which no bidder has qualified to take up the work.  Enclosed as Annexure-7.  Recommendations of NRSC is being implemented to control fire in JCF.
xii	Underground mining should be taken up after completion of reclamation of Opencast mine area.	It shall be complied.
xiii	The OB material should be crushed like sand and be used for stowing in underground mines.	It shall be complied. Scope for OB to sand conversion is being explored and OB to Sand Plant would be established soon.
xiv	A detailed calendar plan of production with plan for OB dumping and backfilling (for OC mines) and reclamation and final mine closure plan for each mine of cluster-VI shall be drawn up and implemented. The schedule of backfilling should be clearly brought out and submit the same to MoEF.	<ul> <li>It is being complied.</li> <li>Mining operation is being done as per approved Calendar Plan.</li> <li>Mine closure plan as per the guidelines of Ministry of Coal has been prepared by Central Mine Planning and Design Institute (CMPDI).</li> <li>Progressive mine closure activities is being implemented regularly as per approved Mine Closure Plan considering present geo-mining conditions.</li> </ul>

xv	The embankment constructed along the river boundary shall be of suitable dimensions and critical patches shall be strengthened by stone pitching on the river front side and stabilized with plantation so as to withstand the peak water flow and prevent mine inundation	<ul> <li>It is being complied. Mining is being done as per the guidelines and permissions of Directorate General of Mines Safety (DGMS) in accordance with Coal Mines Regulation, 2017.</li> <li>Embankment has been constructed in some areas and further embankments shall be constructed. Picture – 3.</li> </ul>
xvi	No mining shall be undertaken where underground fires continue. Measure shall be taken to prevent/check such fire including in old OB dump areas where the fire could start due to presence of coal/shale with sufficient carbon content.	It is being complied. Action is being taken to control, mine fires as specified in Jharia Master Plan and the mining is being done as per the guidelines and permissions of Directorate General of Mines Safety (DGMS).
xvii	There shall be no internal OB dumps. There will be 8 external OB Dumps covering an area of 32.84 Ha. The height of the dumps shall be 16 m and the total quantity shall be of 5.247 Mm3. The final mine voids will have an area of 66.76 ha (Filled up with water). With depth of 25 m bgl. The entire mined out area shall be re-vegetated. Areas where opencast mining was carried out and completed shall be reclaimed immediately thereafter. It was observed that most of the OB are reclaimed total area 441.24 ha at the end of mining where reclaimed external OB dump 32.84 ha and internal OB Dump 120.34 ha. Green Belt over an area of 66.12 ha. Density of tree plantation 2500 trees/ ha of plants which of and abandoned. The proponent should dump all the OB material in abandoned mines.	It is being complied. Action is being taken as specified in EMP. Backfilling of OB is going on concurrent with mining and at the end of mining activity the area will be re-vegetated and reclaimed as per EMP. Plantation work have already been done with the help of DFO, Dhanbad. Also finalized Dump has been reclained and Eco-Restoration Site has been created. Picture – 4.
xviii	Mining shall be carried out as per statuette from the streams/nalas flowing within the lease and maintaining a safe distance from the nalas flowing along the lease boundary. A safety barrier of a minimum 60m width shall be maintained along the nalas/water bodies. The small water bodies in OC shall be protected to the extent feasible and the embankment proposed along water body shall be strengthened with stone pitching.	<ul> <li>It is being complied. Mining is being done as per the guidelines and permissions of Directorate General of Mines Safety (DGMS) in accordance with Coal Mines Regulation, 2017.</li> <li>Embankment has been constructed in some areas and further embankments shall be constructed. Picture – 3.</li> </ul>

xix	Active OB dumps near water bodies and rivers should be rehandled for backfilling abandoned mine voids. However, those which have been biologically reclaimed need not be disturbed.	It is being complied. No OB is being dumped near any water bodies.
xx	Thick green belt shall be developed along undisturbed areas, mine boundary and in mine reclamation.	It is being complied. Plantation & Eco-restoration is being done. Annexure – 3. Picture - 4
xxi	Specific mitigative measures identified for the Jharia Coalfields in the Environmental Action Plan prepared for Dhanbad as a critically polluted area and relevant for Cluster VI shall be implemented.	It is being complied. Action Plan has been prepared in consultation with Jharkhand Pollution Control Board for entire BCCL and not on cluster basis. It is being implemented comprehensively.  Some of the salient actions of this cluster are as under:  1. Covered Truck Transport 2. Construction of Pucca Road wherever feasible. 3. Construction/Maintenance of water reservoir for mine water utilization 4. Plantation. Etc.
xxii	The locations of monitoring stations in the Jharia Coalfields should be finalized in consultation with the Jharkhand State Pollution Control Board.	It has been complied. The optimum location of monitoring stations in Jharia Coal Field has been finalized with the approval of Jharkhand State Pollution Control Board. Enclosed as Annexure – 8.
xxiii	The Committee stated that smoke/dust emission vary from source to source (fuel wood, coal ,fly ash from TPPs, silica from natural dust, etc) and a Source Apportionment Study should be got carried out for the entire Jharia Coalfields. Mineralogical composition study should be undertaken on the composition of the suspended particulate matter (PM10 and PM2.5) in Jharia Coalfields and also quantified. These studies would help ascertain source and extent of the air pollution, based on which appropriate mitigative measures could be taken.	Compliance is under progress.  NEERI, Nagpur has already initiated Source Apportionment Study. NEERI Nagpur has completed the data collection for Summer Season and winter season. NEERI also submitted its first Interim Draft report. NEERI has submitted draft final report which is under examination at BCCL for final comments.  Annexure – 9.
xxiv	The Plan for conveyor-cum—rail for Cluster-VI should be dovetailed with Jharia Action Plan. The Committee desired that road transportation of coal during Phase—I should be by mechanically covered trucks, which should be introduced at the earliest. Coal dispatch shall be diverted from the present rail sidings to Rapid Loading System (RLS) soon after the construction and	for conveyor cum rail system of dispatch. CMPDIL, RI-II has been requested to conduct study and prepare the plan in this regard.

	commissioning of the RLS at Maheshpur is completed. The railway siding order issued and same would come in 3 years. The details of same should be provided to ministry. The mode of transportation of coal by truck till Railway Siding should be by mechanically covered trucks.	
xxv	1387 no. of PAF's should be rehabilitated at cost of Rs 10,768.17 Lakhs as per the approved Jharia Action Plan.	It is being complied. Status of shifting attached – Annexure – 5.
xvi	Regular monitoring of subsidence movement on the surface over and around the working area and impact on natural drainage pattern, water bodies, vegetation, structure, roads, and surroundings shall be continued till movement ceases completely. In case of observation of any high rate of subsidence movement, appropriate effective corrective measures shall be taken to avoid loss of life and material. Cracks shall be effectively plugged with ballast and clayey soil/suitable material.	Regular subsidence monitoring is being done at underground mines.
xxvii	Sufficient coal pillars shall be left un extracted around the air shaft (within the subsidence influence area) to protect from any damage from subsidence, if any.	<ul> <li>It is being Complied.</li> <li>Sufficient coal pillars have been left around air shafts as per Coal Mines Regulations 2017 and DGMS Orders.</li> </ul>
xxviii	High root density tree species shall be selected and planted over areas likely to be affected by subsidence.	<ul> <li>It is being Complied.</li> <li>Planation is regularly done in leasehold area of Cluster VI. High root density plants are regularly planted as per the roadmap prepared by Forest Research Institute, Dehradun.</li> </ul>
xxix	Depression due to subsidence resulting in water accumulating within the low lying areas shall be filled up or drained out by cutting drains.	It shall be complied.     Time to time depression created by the mining operations have been filled by the locally available material and over burden.
xxx	Solid barriers shall be left below the roads falling within the blocks to avoid any damage to the roads.	<ul> <li>It is being Complied.</li> <li>Sufficient barriers are left for saving the surface installation and infra structures as per Coal Mines regulation 2017 and DGMS Orders.</li> </ul>
xxxi	No depillaring operation shall be carried out below the township/colony.	Prior permission is always obtained from DGMS for depillaring.
xxxii	A detailed CSR Action Plan shall be prepared for Cluster VI croup of mines. As stated by the Proponent, it is formulating a detailed Corporate Social Responsibility (CSR) Action Plan through Tata Institute of Social Sciences (TISS), Mumbai which will	It is being complied.  ♣ BCCL is implementing CSR activities at various scale. A separate CSR committee has been formed at area level, which is looking after the works being executed under CSR. Kusunda area is constructing

	consist of need-based base-lit e survey, CSR Action Plan, CSR Auditing and monitoring mechanism etc. Director (Per.), BCCL. along with a team visited TISS/ National CSR Hub, Mumbai on 18th Jun, 2012 for finalizing the MoU with TISS and National CSR Hub for conducting base-line survey, empanelment of NGOs and formulating the project specific CSR action plan for BCCL. The Action Plan for Corporate Social Responsibility will include 5% of the retained earnings of the previous year subject o minimum of Rs. 5 per tonne of coal production of the previous year will be provided for Corporate Social Responsibility (CSR), an amount of Rs. 381.55 lakhs/year has been year marked for the CSR activities.	318 toilets in 179 schools in Chaibasa (Swachch Bharat Abhiyan) initiated by Hon'ble Prime Minister of India.  4 Under CSR Initiatives, preventive health care of public living in command area has been undertaken extensively through Company as well as State Govt. Self-Protection Kit including Mask, Hand wash, Soap, Detergent etc were provided to needy villagers around the coal mines.  4 During pandemic situation, hunger eradication programme were undertaken under CSR/Welfare activities. Dry Food as well as prepared food was distributed among people living in command area. The total nos of beneficiary under this programme was around 10000. Annexure – 2.
xxxiii	The area within Cluster VI ML existing as waste land and not being acquired shall be put for productive use under CSR and developed with fruit bearing and other useful species for the local communities. A third party evaluation shall be carried out regularly for the proper implementation of activities undertaken in the project area under CSR. Issue raised in the Public Hearing shall also be integrated with activities being taken up under CSR. The details of CSR undertaken along with budgetary provisions for the village-wise various activities and expenditures there on shall be uploaded on the company website every year. The company must give priority to capacity building both within the company and to the local youth, who are motivated to carry out the work in future. The gap/space available between the entire mine area should he suitably planted with native species. Plantation should also be made in vacant area and along the road side so as to reduce dust pollution.	CSR and other welfare activities have been taken up on priority basis. The details of activities are enclosed. As <b>Annexure – 2</b> .  Plantation at degraded area and office/colonies premises has been done for development of green belts as per EC. Eco-restoration work are in successful progress at degraded at OB dump areas.  Details of plantation to be done and programme of eco-restoration are enclosed in <b>Annexure-3</b> , <b>Picture -4</b> .
xxxiv	The mine water should be treated properly before supply to the villager.	<b>It is being Complied.</b> Mine water is treated by water filter plant before domestic supply to villagers.
Xxxv	Details of transportation, CSR, R&R. and implementation of environmental action plan for each of the clusters-VI should be brought out in a booklet form within a year and regularly updated.	It is being complied. ¬ Details of Transportation, CSR, R&R and Implementation of Environmental Action Plan is sent on the annual basis along with the Compliance report of October to March.

xxxvi	Central recreation park with herbal garden should be developed for use of all inhabitants.	It is being Complied. The Eco-restoration park at GKKC has been developed and dedicated to residents of the city. It is further being developed into an Eco-Park.
xxxvii	Mine discharge water shall be treated to meet standards prescribed standards before discharge into natural water courses/agriculture. The quality of the water discharged shall be monitored at the outlet points and proper records maintained thereof and uploaded regularly on the company website.	It is Being complied. The work of monitoring of water is being carried out by CMPDI. Report Enclosed as Annexure – 10.
xxxviii	No groundwater shall be used for the mining activities. Additional water required, if any shall be met from mine water or by recycling/reuse of the water from the existing activities and from rainwater harvesting measures. The project authorities shall meet water requirement of nearby village(s) in case the village wells go dry to dewatering of mine.	It is being complied.  Mine water is being used for the industrial as well as domestic purpose. Mine water is also supplied to colonies and community after filtration through pressure filters, slow sand filters and rapid sand filters.  A MoU has been signed between Coal India Ltd. & Govt. of Jharkhand for providing mine water to nearby villages. A copy of MoU has been enclosed as Annexure 11.
xxxix.	The void shall be converted into a water reservoir of a maximum depth of 15-20 m and shall be gently sloped and the upper benches of the reservoir shall be stabilized with plantation and the periphery of the reservoir fenced. The abandoned pits and voids should be backfilled with OB and reclaimed with plantation and or may be used for pisciculture.	It shall be complied.
xl	Regular monitoring of groundwater level and quality of the study area shall be carried out by establishing a network of existing wells and construction of new piezometers. The monitoring for quantity shall be done four times a year in pre-monsoon (May), monsoon (August), post monsoon (November) and winter (January) seasons and for quality including Arsenic and Fluoride during the month of May. Data thus collected shall be submitted to the Ministry of Environment & Forest and to the Central Pollution Control Board/SPCB quarterly within one month of monitoring. Rainwater harvesting measures shall be undertaken in case monitoring of water table indicates a declining trend.	<ul> <li>For Construction of Piezometers, tender has been cancelled thrice. Re tendering is under process. Annexure – 13.</li> <li>CMPDI is regularly conducting study of groundwater level and quality of areas within Cluster VI. Groundwater monitoring data has been enclosed as Annexure 12.</li> </ul>

xli [	ETP shall also be provided for workshop,	It is Being Complied. Picture – 5.
	and CHP, if any. Effluents shall be treated to	
	confirm to prescribe standards in case	
	discharge into the natural water course.	
	For monitoring land use pattern and for post mining land use, a time series of land use maps, based on satellite imagery (on a scale of 1:5000) of the core zone and buffer zone, from the start of the project until end of mine life shall be prepared once in 3 years(for any one particular season which is consistent in the time series), and the report submitted to MOEF and its Regional office at Bhubaneswar.	Land Use Map of Cluster VI has been prepared by CMPDIL using remote sensing data for monitoring of land use pattern and for post mining land use. The latest report as submitted by NRSC in this regard is attached as Annexure − 14.
	A Final Mine Closure Plan along with details	It shall be complied.
C F k	of Corpus Fund shall be submitted to the Ministry of Environment & Forests five year before mine closure for approval. Habitat Restoration Plan of the mine area shall be	CMPDI has prepared "Mine Closure Plan" for all the mines of Cluster VI.  In order to restore the original ecological system, Kusunda Area has initiated ecological restoration at
f	carried out using a mix of native species found in the original eco system which were conserved in-situ and ex-situ in an identified area within the lease for reintroduction in the	various sites as per roadmap prepared by Forest Research Institute. Native species of flora and fauna can be seen on these sites. <b>Picture – 4.</b>
r F	mine during mine reclamation and at the post mining stage for habitat restoration, the mining plan and post-mining plan, closure plan should be prepared and submitted to	
	the Ministry;  A separate management structure for	It has been complied
i	implementing environment policy and socio- economic issues and the capacity building required in this regard.	-
XIv (	Corporate Environment Responsibility.	
` ´   [	The Company shall have a well laid down Environment Policy approved by the Board of Directors.	A well-defined Corporate Environment Policy has already been laid down and approved by the Board of Directors. This is also uploaded on company's
	The Environment Policy shall prescribe for	website. Annexure - 15 Complied.

(c.)	standard operating process/procedures to bring into focus any infringements/deviation/violation of the environmental or forest norms/conditions.  The hierarchical system or Administrative Order of the company to deal with environmental issues and for ensuring compliance with the environmental clearance conditions shall be furnished.	It has been complied.  A hierarchical system of the company to deal with environmental issues from corporate level to mine level already exists. Complied.  • A full-fledged Environment Department, headed by a Dy.GM (Environment) along with a suitable qualified multi-disciplinary team of executives have been established at Company Headquarters for implementation of Environment Policy of the company.  • One Executive in each area has also been nominated as Nodal Officer (Environment) for looking after routine environment related jobs along with an Environment Management Cell at Area Level.
(d.)	To have proper checks and balances, the company shall have a well laid down system of reporting of non-compliances/violations of environmental norms to the Board of Directors of the company and/or shareholders or stakeholders at large.	Being complied.
В.	General Conditions	
i	No change in mining technology and scope of working shall be made without 'prior approval of the Ministry of Environment and Forests.	It shall be Complied.
ii	No change in the calendar plan of production for quantum of mineral coal shall be made.	It is being Complied. Production of clusters are well within the production capacity as per EC.
iii	Four ambient air quality monitoring stations shall be established in the core zone as well as in the buffer zone for PM10, PM2.5, SO2 and NOx monitoring. Location of the stations shall be decided based on the meteorological data, topographical features and environmentally and ecologically	<ul> <li>It has been Complied.</li> <li>The optimum location of monitoring stations in Jharia Coal Field has been finalized with the approval of Jharkhand State Pollution Control Board. Enclosed as Annexure – 8.</li> <li>Air quality Monitoring report has been enclosed as Annexure-16.</li> </ul>

	sensitive targets in consultation with the State Pollution Control Board. Monitoring of heavy metals such as Hg, As, Ni, Cd, Cr, etc.	
iv	carried out at least once in six months.  Data on ambient air quality (PM10, PM 2.5, SO2 and NOX) and heavy metals such as Hg, As Ni, Cd, Cr and other monitoring data shall be regularly submitted to the Ministry including its Regional Office at Bhubaneswar and to the State Pollution Control Board and the Central Pollution Control Board once in six months. Random verification of samples through analysis from independent laboratories recognized under the EPA rules, 1986 shall be furnished as part of	It is being complied.  Data is regularly submitted to ministry along with compliance report. Annexure- 16.
V	compliance report.  Adequate measures shall be taken for control of noise levels below 85 dB(A) in the work environment. Workers engaged in blasting and drilling operations, operation of HEMM, etc shall be provided with ear plugs/muffs.	It is being complied.  Personnel operating HEMMs, drilling machine and other machines comply with safety regulation and are equipped with Personal Protective Equipment. Noise monitoring data has been enclosed as Annexure 17.
Vi	Industrial wastewater (workshop and waste water from the mine) shall be properly collected, treated so as to conform to the standards prescribed under GSR 422 (E) dated 19th May 1993 and 31st December1993 or as amended from time to time before discharge. Oil and grease trap shall be installed before discharge of workshop effluents.	It is being complied.  Effluents discharge standards are regularly monitored by CMPDIL for cluster VI group of mines.  Mine water is being treated using filter plants (Pressure, Sand filters etc.) for its further use in industrial purpose and supply to the community. Mine water monitoring report has been enclosed as Annexure 10.
Vii	Vehicular emissions shall be kept under control and regularly monitored. Vehicles used for transporting the mineral shall be covered with tarpaulins and optimally loaded.	It is being complied.  Vehicles used for transportation of coal are always covered by tarpaulin and being monitored for the vehicular emission by the transporter and BCCL.  Copy of some Emission under Control/Fitness Certificate has been enclosed as Annexure 18.
viii	Monitoring of environmental quality parameters shall be carried out through establishment of adequate number and type of pollution monitoring and analysis equipment in consultation with the State Pollution Control Board and data got analyzed through a laboratory recognized under EPA Rules, 1986.	It is being complied.  Ambient environmental monitoring is being done by CMPDIL. Monitoring data have been enclosed as Annexure - 10, 16, 17.

ix	Personnel working in dusty areas shall wear protective respiratory devices and they shall also be provided with adequate training and information on safety and health aspects.	It is being Complied. A separate full-fledged Human Resource Development Deptt. is conducting regular training programme on these issues. Apart from this Vocational Training Centers (VTC) are existing in the Area which provides periodical training on the safety and occupational health issue to each of the workers working in the mines. The VTC training data is enclosed in <b>Annexure-4</b> .
х	Occupational health surveillance programme of the workers shall be undertaken periodically to observe any contractions due to exposure to dust and to take corrective measures, if needed an records maintained thereof. The quality of environment due to outsourcing and health and safety issues of the outsourced manpower should be addressed by the company while outsourcing.	It is being Complied.  Periodical medical Examination (PME) of all the mining and other personnel is being carried out regularly Regional Hospital, Bhuli as per the Coal Mines Regulation 2017 and Director General of Mines Safety (DGMS) guidelines. Enclosed as Annexure 19.
хi	A separate environmental management cell with suitable qualified personnel shall be set up under the control of a Senior Executive, who will report directly to the Head of the company.	<ul> <li>A full-fledged Environment Department, headed by a Dy.GM (Environment) along with a suitable qualified multi-disciplinary team of executives have been established at Company Headquarters for implementation of Environment Policy of the company.</li> <li>One Executive in each area has also been nominated as Nodal Officer (Environment) for looking after routine environment related jobs along with an Environment Management Cell at Area Level.</li> </ul>
xii	The funds earmarked for environmental protection measures shall be kept in separate account and shall not be diverted for other purpose. Year-wise expenditure shall be reported to this Ministry and its Regional Office at Bhubaneswar	It is being compiled. Funds for environmental protection measures area kept in separate head which is only used in environmental management activities
xiii	The Project authorities shall advertise at least in two local newspapers widely circulated around the project, one of which shall be in the vernacular language of the locality concerned within seven days of the clearance letter informing that the project has been accorded environmental clearance and a copy of the clearance letter is available with the State Pollution control Board and may also be seen at the website of the ministry of Environment & Forests at <a href="https://www.envfor.nic.in">www.envfor.nic.in</a> .	It has been complied.  Advertisement in local newspaper has also been done.

xiv	A copy of the environmental clearance letter shall be marked to concern Panchayat /Zila Parishad, Municipal Corporation or Urban local body and local NGO, if any, from whom any suggestion/representation has been received while processing the proposal. A copy of the clearance letter shall also be displayed on company's website.  A copy of the environmental clearance letter shall also be displayed on the website of the concerned State Pollution Control Board.  The EC letter shall also be displayed at the Regional Office, District Industry Sector and	It has been complied.  It has been complied.
xvi	Collector's Office/Tehsildar's Office for 30 days.  The clearance letter shall be uploaded on the company's website. The compliance	It is being Complied.
	status of the stipulated environmental clearance conditions shall also be uploaded by the project, authorities on their website and updated at least once every six months so as to bring the same in public domain. The monitoring data of environmental quality parameter (air, water, noise, and soil) and critical pollutant such as PM10, PM2.5, SO2 and NO, (ambient) and critical sectoral	
	parameters shall also be displayed at the entrance of the project premises and mine office and in corporate office and on company's website.	
xvii	The project proponent shall submit six monthly compliance reports on status of compliance the stipulated environmental clearance conditions (both in hard copy and in e-mail) to view respective Regional Office of the Ministry, respective Zonal Office s of CPCB and the SPCB.	
xviii	The Regional Office of this Ministry located at Bhubaneswar shall monitor compliance of the stipulated conditions. The Project authorities shall extend full cooperation to the office) s) of the Regional Office by furnishing the requisite data/information/monitoring reports.	It is being Complied.
xix	The Environmental statement for each financial year ending 31 March in Form —V is mandated to be submitted by the project proponent for the concerned State Pollution Control Board as prescribed under the	It is being Complied.

	Environment (Protection) Rules, 1986, as amended subsequently, shall also be uploaded on the company's website along with the status of compliance of EC conditions and shall be sent to the respective Regional Offices of the MoEF by E-mail.	
6.	The proponent shall abide by all the commitments and recommendations made in the EIA/EMP report so also during their presentation to the EAC.	Agreed
7.	The proponent is required to obtain all necessary clearances/approvals that may be required before the start of the project.	Agreed
8.	The Ministry or any other competent authority may stipulate any further condition for environmental protection.	Agreed
9.	Failure to comply with any of the conditions mentioned above may result in the withdrawal of this clearance and attract the provisions of the Environment (Protection) Act, 1986.	Agreed
10.	The above conditions will be enforced interalia, under the provisions of the Water (Prevention & Control of Pollution) Act, 1974, the Air (Prevention & Control of Pollution) Act, 1981. The Environment (Protection) Act, 1986 and the Public Liability insurance Act, along with their amendments and Rules. The proponent shall ensure to undertake and provide for the costs incurred for taking up remedial measures in case of soil contamination. Contamination of groundwater and surface water, and occupational and other diseases due to the minting operations.	Agreed

The Environmental Clearance is subject to the outcome of the Writ Petition filed b. M/S Bharat Coking Coal Limited (BCCL) in response to the closure orders issued by the Jharkhand State Pollution Control Board which is pending in the Jharkhand High Court.	Agreed			
			200	 _

Project Officer

Gondudih Khas Kusunda Colliery/ Bassuriya Colliery

Project Officer

**Godhur Colliery** 

Name of the Mine	Annual Production (Te)							
Godhur	248397							
Gondudih Khas Kusunda Colliery	1594981							
East Bassuriya Colliery	603118							
Total	24, 46, 496 (2.4 MTPA)							

	Ma	sks	Sanitize	ers(Ltrs)		/Liquid	I	ching er (Kg)	Spirit(Ltrs)			
Area	Procure d/Distri buted	Stock at	Procure d/Distri buted	Stock at	Procure d/Distri buted	Stock at Hand	Procure d/Distri buted	Stock at	Procured /Distribu ted	Stock at Hand		
Kusunda	6900	Nil	180	30	230	Nil	2850	600	30	NIL		

## Other Actions by the Management at Kusunda Area:

- 1. Hand washing facility along with soap have been made available at all attendance point and working place of units and Area Estbl. under Kusunda Area.
- 2. Bleaching powder being continuously spread in units, Area Estbl. and all localities under Kusunda Area which includes Jawahar Nagar Colony, Jha Colony, CISF Camp, Coal Board Colony, Ropeway Colony and New Karmik Nagar Colony.
- 3. HEMM equipment have been sanitized at Departmental Patch of ADIC, Kusunda Area
- 4. Establishments are being sanitized completely.
- 5. Awareness program run at Area, Units and Colonies making employees aware about social distancing and facts related to COVID 19. Pamphlets, Banners, Hand Bills distributed in all units and Area Estbl.
- 6. ID Cards distributed amongst all contract workers for the purpose of emergency duty related to production in Kusunda Area, BCCL
- 7. Phenyl -4 Bottles of 5 Ltrs each distributed in units and Area Estbl.
- 8. One Thermal Scanner procured. One More thermal scanner is placed under procurement. Total 161 Employees and Executives have been scanned with Thermal Scanner.
- 9. Surgical Gloves (6 Pieces) have been currently placed under procurement.
- 10. Food material distributed by the management of Kusunda Area at Jiwan Jyoti Ashram Kusunda, 9 No. Slum, 27 No. Slum, Ena Colliery, Gondudih Colliery, Shiv Mandir at Godhur, Rise Area near MRS Dhansar and Lahbera Manjhi Basti.
- 11. Distribution of Mask and Handwash to the nearby Colonies under Under Kusunda Area
- 12. New Karmik Nagar Colony has been sanitized.
- 12. ADIC and ENA office has been sanitized.
- 13. Food materials (1200 Packets) distributed by the management of Kusuda Area under CSR Fund at :- Rise Area & Tikia Para of ADIC: Kusunda Bhuiya toli, Kusunda railway crossing & Gondudih Munda basti of Gondudih OP: Godhur 9 No. Basti: Kurmidih Basti: 10 No. Khas Kusunda Bouri Basti: Kusunda Area Office: Kharikabad Basti: Basseriya & Dharijoba Basti: Bhim Talao Kharikabad

- Work Order for 530 mos of bamboo gabion plantation has been issued to DFO, Dhanbad.
- Plantation- At Gondudih- Khas Kusunda Colliery about 500 no. bamboo-gabion plantation have already been done.
- In 2014-15 At 1<sup>st</sup> Ecological restoration site a total of about 6402 no. plants and plenty of grass-seeds in an area of 2.0 Ha have been planted successfully with encouraging results, and natural eco-system is being established there with increasing flora & fauna (Fig.2).
- In 2015-16 At 2<sup>nd</sup>. eco-restoration site (about 1.79 Ha OB dump- area) about 2400 plants along with seeds of grass and shrubs have spread over since 2015-'16 successfully.
- In 2016—17 And at 3<sup>rd</sup>. site, (about 3.0 Ha OB dump area) about 5322 plants and plenty of grass seeds have been planted
- In 2018-19 A 4<sup>th</sup> site of area about 4.99 Ha has been taken up in the year 2018-19. Till March, 2019 a total of 12,482 saplings have been planted.
- In 2019-20, at all four sites more 4465 plant has been planted and 5000 seed ball broadcasted and 983 plants have been planted in lease hold of mines under Kusunda Area.
- In 2020-21 A new site adjacent to site 1 is proposed for plantation.

### PLANTATION/ECOLOGICAL-RESTORATION PROGRAMME

Plantation/Ecological Restoration Programme (Cluster-VI & part of Cluster-VII mines of Kusunda Area):

YEAR	CLUSTER VI & CLUSTER VII(Part under Kusunda Area)	No.of saplings/plants
2020-21	More Planation in Existing Eco Restoration	5000
2022-23	At various location being surveyed	5000
2023-24	At various location being surveyed	5000

# **Status of Training**

SI. No.	Month	Refresher Training	Initial Training	Contractual Worker	Change of Job	Special Training
1	October	33	0	15	0	0
2	November	22	3	3	0	19
3	December	26	3	11	4	11
4	January	42	2	6	2	30
5	February	35	0	6	1	21
6	March	37	3	14	0	10
	Total	195	11	55	7	91

#### STATUS OF JHARIA MASTER PLAN DOVETAILED WITH ENVIRONMENT CLEARANCE CONDITIONS

#### Rehabilitation and Fire control measures

#### **Socio-economic Survey:**

Survey of fire affected families (non-BCCL) at Kusunda Area has been nearly completed by JRDA and distribution of ID Card has been partially done by JRDA.

#### **Accommodation provided in Satellite Township:**

 Till about 1464 quarters out of 1700 total newly quarters constructed in colonies at East Bassuriya and at Jagjivan Nagar and Karmik Nagar have been allotted to the employees residing at coal bearing/fire affected areas in different collieries under Kusunda Area and out of which 793 employees have been shifted. More quarters are under construction for phase wise shifting of employees.

#### Status of fire dealing:

Under Master Plan, many Fire schemes have been formulated / prepared /implemented for dealing fires sites spread in collieries of BCCL. Further for expediting the fire dealing process, excavation methods has been resorted to by deploying Hired HEMM at various mines of BCCL. Total digging out of fiery coal has been adopted for dealing of fire.


In fire patch of V/VI/VII/VIII seam of Gareria Secn. at East Bassuriya, about 1,70,000 cu.m. mitti and non-combustible material has been filled, rest will be filled by quarry OB.

At Kusunda Colliery total firey coal are being dug out as a measure of fire dealing with the deployment of hired HEMM, and at Ena OC, after restart, total firey coal will be dug out. The underground workings of Alkusa Colliery has been sealed due to fire threats after taking measures to control UG fire as per CMR'57 DGMS guidelines. The coal reserve of Alkusa Colliery will be extracted from Kusunda OC side. For control and monitoring of threat of subsidence at fire affected area within Godhur lease hold special attention has been made by mine management.

111	Phase-III	Total													Phase-II	Total									1-aseua	200		Ī		Ī		Ī	Ī
1			12	11	10	9	00	7	0	10	7	4	3	2	21	li	00	7	6	5	4	3		2	1	1040	-	-			-	÷	
	1/137		1/149	2/171	2/170	2/175	2/174	2/173	2/1/2	COT /2	2/160	2/168	2/167	1/154	1/150		2/166	2/165	2/163	1/134	1/133	1/153		2/215	2/17				Towns.	Site			7
contract afresh as	Colliery Otrs/03		Gwala Patti/01	Gondudih Bastee/03	2/170 Dharia Joba Village/04	2/175 Kusunda Station Village/06	2/174 Kharikabad Bastee/09	2/173 Hospital Bastee/08	Harijan Bastee/US		Company Otr west of Bhull Boad/12	20.0	100	2000	No 1 Bastee/01		Rise Bhagatdih Colony/06	KOCP Office and Colony qtrs.	Lahabera Bastee/03	Officer Colony & B.UP Area/05	No 2 Colony/04	West Ena 1 & 2 Pit/01	-		2/176 Keska Basti Qtrs								State Legalities
100	228	994	287	35	54	66	63	TOT	249	5	n	4	125	84	120	1998	276	64	65		289	879		8 425	0	(No	SUN SUN		0		enc		Tota
1 1	6	2	50	26	13	4	87	2		1 4	-0 (	0	0	0	1	8 3	0	0	0	0	0	0		0	Ci.	(Non LTH) L	surveyed				encroache		Total no on leto.
1	639	258		6	3		7	0													-199					HIJ				9			0.00
	Upto Zer		Seam						Upto Zero						Extracted		Seam		Comb.	Seam	Upto Zero	Extracted	Seam		Comb.	Upto Seam Seam			A CONTRACTOR OF THE PARTY OF TH	no of Extracted			
2	Zero Nil	1	1		i			- 7	6						N		& Below		IV S		0	Z	& Below		IV Se	n Sean					-	i	100
		ISLMI	1M1 6E1		00 1111	TMIOS				Ī	Ī				59 LMT	139 LMT	wol		IV Seam 10 LMT			70 LMT	woi		IV Seam 59 LMT	Seam	Upto	Extracted		be		Locked To	Coni
L		Urban													Urban	-					-		-		Urban K	/Rurai		ed				10	Orben
21.0		Ena (		Basseriya	KKC	KKC	KKC	XXC	XXC	XXC	KKC	KKC	KKC	Khas Kusunda	Basseriya		Industry	Industry	Industry	Ena	Ena	Industry	(Kenduad	Godhur		Kusunda Area			Colliery				en (Warne
	0	0	0	0			0					1000	-	nda	0	94	18	0	0	100	47	0	H)	29		Area J.R.D.A	Area b	22	of	8	Allotted	Quarters	of Total
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	26	1	0	0	0	Ut	0		20		100	~	of the	rece	non- who	-	ers non	nun
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	_	29/2/2020 2	allotment Be order as on on		eceived		allottees		number of Total
											200						910									29/2/2020	Belgaria as on	quarter a	allotted	have shifted t	allottees	LTH of non LTH JRDA	
0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	243	96		0		82			65	0	900	expansion again sent to	at poject	required for	to urgently	reported by	H JRDA qtrs	no. Total no. of

Vacated/ mining Total sites where is done operation 10 2/160 3 Pit Area/03 1/151 Rawani Bastee 2/159 Gareria Bastee/01 2/125 Qtrs near 6/7 Pit /03 1/122 Hutment Near Durga mandir/05 1/121 DAV school & G camp/02 1/156 1/155 Kusunda Village/01 2/161 Beldar Bastee 2/164 2/158 New Delhi Colony/03 2/156 Bright Kusunda Colony/02 2/124 GM bunglows & qtrs/04 1/123 2/162 10 no Dhowra/08 1/152 Surender Colony(East Loyabad) Officers qtrs near Thana/01 Kusunda Village/01 80
workshop Office and Qtrs (PK1 & 2 Pit 187 East Godhur Colony/01 Huchuktand Bastee/02 Area)/04 37 65 44 122 272 233 291 134 2850 0 5842 000000 00 354 78 1152 o 0 1413 Seam & NIL Comb. upto Excavated Seam Comb. Zero Seam Zero IV Seam Z Z & Below IV Seam & Below 30 LMT NIL Z 25 LMT 20 LMT 10 LMT 160 LMT 30 LMT Urban (Industry) Alkusa Alkusa Alkusa Dhansar Dhansar Alkusa Alkusa Kusunda Godhur Kusunda Godhur Godhur Colliery through 90000000 000000 96 260000000 00000 26 00000 00000000 0 000000 000000 0 243

Total

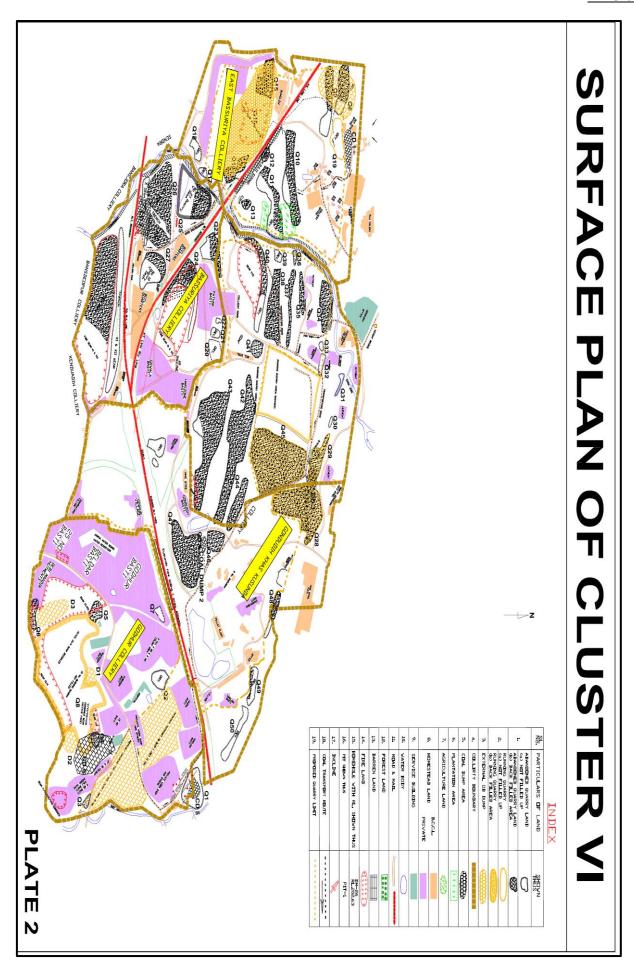

#### Global Expression of Interest (EoI)

For

Dealing with coal mine fires in lease hold of BCCL in Jharia Coalfield, Dhanbad, Jharkhand, India. Detailed scope of work as given in the document.

LAST DATE OF SUBMISSION: 28.04.2014

#### 1. BHARAT COKING COAL LIMITED: A PROFILE

Bharat Coking Coal Limited incorporated in January, 1972 is a fully owned subsidiary of Coal India Limited a 'Maharatna' Public Sector Undertaking under the Ministry of Coal, Government of India. Being the sole repository of prime coking coal in the country, BCCL, at present operates 66 coal mines spread over in Jharia Coalfield and part of Raniganj Coalfield apart from 6 coking coal washeries & 2 non-coking coal washeries. The mines are grouped under 12 areas for administrative convenience. BCCL has some unique inherent and perennial characteristics which are adversely affect the normal operation of the Company. Difficult geo-mining conditions involving large number of overlaying coal seams, preponderance of old workings, high degree of gassiness, coal fires affecting working seams, water logged upper seams above current places of working, etc, restricts coal production and productivity. Besides, high density of population in the coal bearing areas limits the equipment size of opencast operations apart from being an impediment to acquisition of land for uninterrupted operations. In the year 2012-13, the company achieved a coal production of 31.21 million tone and offtake of 32.99 million tone thereby registering the highest ever the Turnover and Profitability (PAT) of Rs 10176.62 Cr. and Rs 1709.06 respectively. A brief description of the organizational structure and the detailed activities of Bharat Coking Coal Limited can be viewed in the website http://www.bccl.gov.in.

The mission is to produce planned quantity of coal efficiently and economically in an Ecofriendly manner with due regard to Safety, Conservation & Quality. The company strives to meet the growing demand of thermal as well as metallurgical coal in the country in a environmentally and socially sustainable manner.

#### 2.2. Bidder's Credential Requirement:

- i) The bidder(s) must have successfully dealt with mine fire in at least two coal mines, one open cast and one underground mine. The annual capacity of opencast and underground mines should be at least 2 Mt and 0.5 Mt respectively during last seven years of last financial year. The documentary proof of successful dealing with fire shall be submitted along with the bid.
- ii) The bidders in their name must be to achieved a minimum average annual financial turnover of INR One Hundred Million or equivalent USD during last 3 years ending 31st March of previous financial year. The documentary evidence to this effect would be copies of audited Balance Sheet and Profit & Loss A/c duly countersigned by the authorized representative of bidding company and a declaration to the above affect duly signed by the authorized representative of bidding company & counter signed by a Chartered Accountant or equivalent.
- iii) The bidder must possess "key personnel" (minimum number) of the following categories with requisite qualificaries and experience:-

Sl. No	Skill of key personnel	Requisite Quantication	Minimum Experience	Minimum Nos. for eligibility				
1.	Technical Expert (Mining/ Fire dealing/ More Rescue)	B.E./B.Tech (Mining) or equivalent	10 years.	10				
2.	Technical Expert (Geology/Remote Sensing)	M. Sc (Geology) or equivalent	10 years	2				
1	Technical expert (Unvironment)	B. Tech/BE/M.Sc.(Envr) or equivalent	10 years	1				
1.	echnical Expert (Infrastructure)	B.7: /B.Tech (!sechanical / Electrical / ivil) or equivalent	10 years	3				
5.	IT Expert	B.E /B. Tech/ M.Sc (Computer) or equivalent	10 years	!				
6.	Financial Expert	MBA(Finance)/Chartere d Accountant/ICWA or equivalent	10 years	1				

Note: The bidder shall designate me of the team members as the team leader.

The documentary evidence to the effect would be self-attested CVs including necessary competency certificate for work in Indian mines duly countersigned by the authorized representative of bidding company.

- iv) Copy of PAN (Permanent Account Number) with Income Tax Authority in India for bidder(s) from India.
- Copy of PAN Based Service Tax Registration Number in India for bidder (s) from India.

## 3.0 Availability of details for EOI;

Details for EOI including Terms and Conditions of EOI can be collected from the following place during the period as stated below:

Date: From 27.01.2014 to 26.02.2014.

Time: 10.00 AM to 1.00 PM (on all working days)

Office of the GM (CMC) Contract Management Cell, BCCL Level-V, Koyla Bhawan, Dhanbad - 826005

Details for EOI including Terms and Conditions of EOI can also be downloaded directly from the BCCL web-site http://www.bccl.gov.in and NIC Portal, website http://www.tenders.gov.in during the period as mentioned above.

### 4.0 Pre - EOI submission meeting :

Pre - EOI submission meeting will be held on 14.02.2014 at 11:00AM in the office of GM (CMC), BCCL, Level-V, Koyla Bhawan, Dhanbad for clarifications and discussion.

# 5.0 GENERAL INSTRUCTIONS FOR SUBMISSION OF EOI:

Expression of Interest (EOI) shall be submitted by the Consultants / agencies / firms / organizations in a sealed envelope superscribed with "EOI for Dealing with coal mine fires in lease hold of BCCL in Jharia Coalfield, Dhanbad, Jharkhand, India. Detailed scope of work as given in the document." giving EOI reference no. with date and full postal address & telephone nos, on the envelope.

#### RECEIPT OF EOI 6.0

EOI will be received in sealed envelopes up to 28.04.2014 at the following address only: .

Office of the GM (CMC) Contract Management Cell, BCCL Level-V, Koyla Bhawan, Dhanbad - 826005

The offers may be submitted through post also. BCCL takes no responsibility for delay, loss or non receipt of the offers send by post. Fax offers or offers sent through e-mail shall not be accepted.

# 7.0 OPENI™G OF THE EOI:

EOL si be opened on 29.04.2014 at 04.00 PM in the office of the GM (CMC), BCCL, Level-V 🐣 yla Bhawan, Dhanbad-826005.

- Adders are requested to go through the details of EOI document & enclose all the required documents along with the proposal. Each page of the proposal shall be signed with seal.
- 9.0 Prospective parties may note that mere submission of EOI and / or submission of additional information do not automatically entitle them to claim for pre-qualification, BCCL reserves the right to seek for any other information during the process of evaluation, if required,
- 10.0 BCCL reserves the right to reject any / all the applications to EOI without assigning any reason(s) whatsoever thereof. Sd/-

General Manager (Contract Management Cell)

#### Distribution:

- PRO With a request to publish the abridged EOI as enclosed in local as well as National dailies as per norms of the Company and also arrange to send the paper cutting of publication to the Contract Management Cell.
- $D(T)OP \, / \, D(\bar{T})P\&P \, / \, D(\bar{F}) \, / \, D(P) \, / \, CVO.$
- GM(Co-ordn) / GM(S&M) / GM(F)I/C / GM(M&M) / GM(E&M) / GM(Exev) / GM(P&P) 2. 3. / GM(IE) / GM(System) / Dy. GM (Envt.), BCCL
- Sr.ES to CMD for kind information of CMD.
- HOD (Admn) with a request to display this EOI in Koyla Bhawan Notice Boards. 4.
- All CGMs/GMs of the Areas including Washery Zones for wide circulation through 5. 6. display in the Notice Boards.
- Inspector, CISF- with a request to deploy security personnel at the office of GM (CMC), Level-V, Koyla Bhawan on 28.04,2014 from 9:30A.M to 4:00P.M and on 29.04.2014 7. from 3:30 PM till completion of the meeting.
- Desk In-Charge, BCCL, M M Division, 4th floor, 6, Lyons Range, Kolkata.
- CGM / GM (Contract Management Cell), WCL/SECL/NCU/MCL/ECL/CCL & CIL 8.
- Sri R.K. Choubey, Sr. DEO / Sri B N Banerice, DEO, CMC Deptt. to upload this EOI in BCCL Website and forward soft copy of NIC format to GM (System) for uploading the 10. same at NIC portal website (soft copy of the same is enclosed for needful).

Sd/-General Manager. (Contract Management Cell)



Ph: 0326-2204933



## झारखण्ड राज्य प्रदूषण नियंत्रण पर्षद् Jharkhand State Pollution Control Board HIG-1, Housing Colony, Dhanbad-826001

Letter	No.	 21	50
Louis	110.	 Charles P	50000

Dated 6/2/13

From,

Regional Officer,

Dhanbad

To.

HOD (Envt.), M/s. B.C.C.L.,

Koyla Bhawan, Koyla Nagar,

Dhanbad.

Sub:

Fixing up monitoring station/Sampling location of Air, Water & Noise.

Sir,

With reference to you letter no. GM(Env.)/F-JSPCB/2013/783, dt. 06.07.2013 We have approved Air, Water & Noise monitoring Station/Sampling location after verification and return a copy of the map.

Encl-A/a.

Your's faithfully,

(Dinesh Prasad Singh) Regional Officer.


Memo...... Dhanbad, dated.....


Copy to: The Member Secretary, Jharkhand State Pollution Control Board for information & enclose a copy of the map for necessary action.

Encl-A/a.

(Dinesh Pd. Singh) Regional Officer.

Printed by Sandir

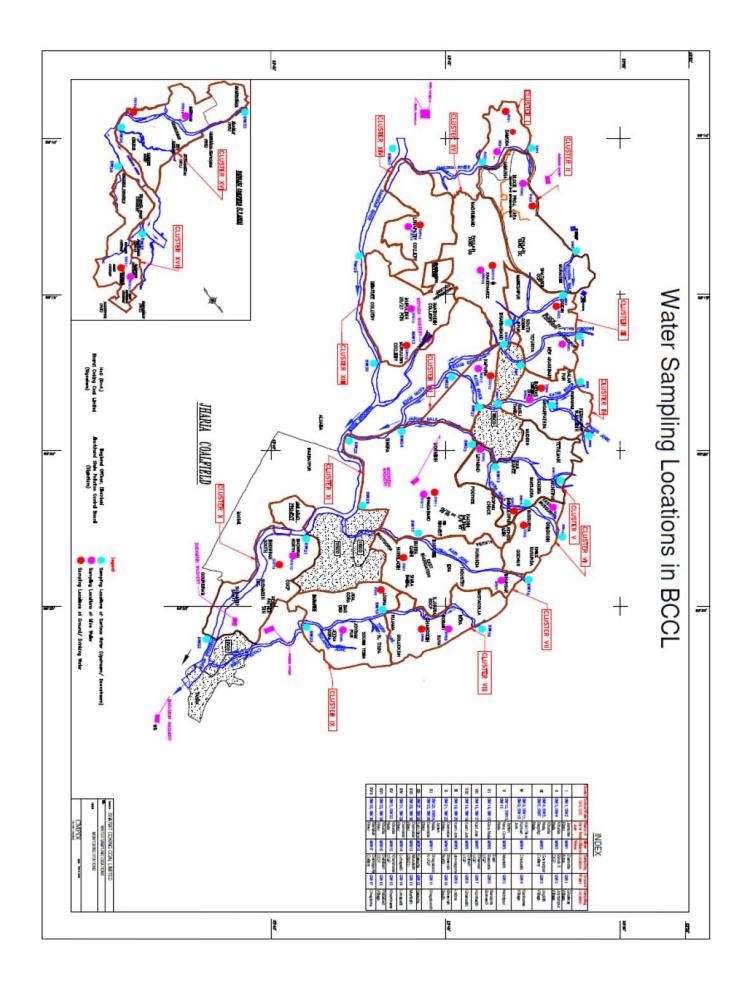

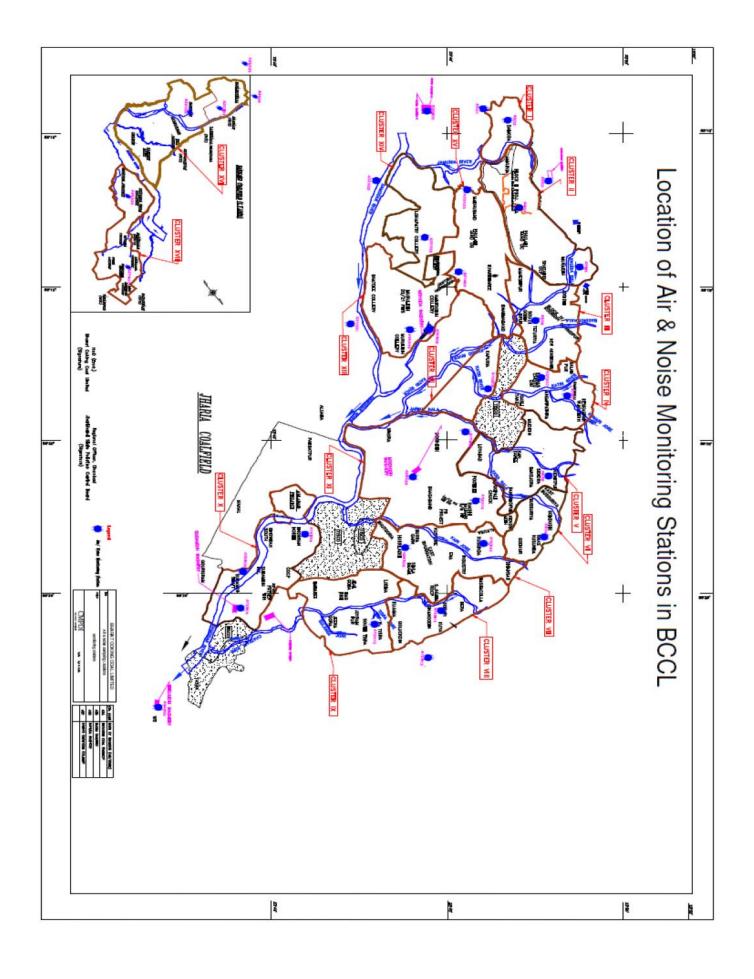



#### COAL INDIA LIMITED कोल इण्डिया लिमिटेड **ENVIRONMENT DIVISION** पर्यावरण बिभाग

Corporate Identity Number: L23109WB1973GOI028844 COAL BHAWAN, Premises No -04MAR Plot no - AF-III, Action Area- IA RAJARHAT, NEW TOWN KOLKATA - 700156,

E-mail: cgmenv.cil@gov.in, Web:www.coalindia.in TEL: 033-23246638 / FAX: 033-23244232

CIL/ENV/2015-16/ 7000

09//12/2015

General Manager(Environment)/ HOD (Environment), ECL,BCCL,CCL,NCL,SECL,WCL,CMPDIL,NEC,MCL,

Sub: MoU between Coal India Ltd. & NEERI for "Sustainable Coal Mining in Coal India Ltd."

महोदय.

In view of the directive of 321 th CIL Board held on 15 th October 2015 pertaining to enter into a long term. MoU between CIL and CSIR -NEERI for identification of environmental issues through assessment of monitoring data of CIL and preparing an action plan for implementing the same in coal mining, MoU has been signed between Coal India Ltd and National Environmental Engineering Research Institute Ranchi, on

Copy of the MoU is enclosed herewith for your information.

मुख्यप्रबंधक /पर्यावरण सी. आई. एल.,

संलग्न : उपयेक्त

# भारत कोर्किंग कोल लिमिटेड

एक मिनी रत्न कम्पनी
(कोल इंडिया लिमिटेड का एक अंग)
उप महाप्रबंधक (पर्यावरण) का कार्यालय
कोयला भवन,कोयला नगर, धनबाद-826005



## **Bharat Coking Coal Limited**

A Mini Ratna Company
(A Subsidiary of Coal India Limited)
Office of the Dy. GM (Environment)
Koyla Bhawan, Koyla Nagar, Dhanbad -826005

CIN: U10101JH1972GOI000918

पत्र संख्या :भाकोकोलि/उपमहाप्रबंधक)पर्या/( SOURCE APPORTIONMENT (MoU) /NEERI /2018/

दिनांक:12.05.2018

To,
The Director,
CSIR-NEERI,
Nehru Marg,
Nagpur- 440020
Maharashtra

Sub.: Work Order for the Project "Source Apportionment of ambient air particulate matter in Jharia coalfields region, Jharkhand".

Ref:

- (i)Memorandum of Understanding between CIL & NEERI dated 03.12.2015
- (ii)your proposal vide email dated 12.09.2016 and subsequent amendment including GST rates
- (iii) "Terms of reference for the Project "Source Apportionment of ambient air particulate matter in Jharia coalfields region, Jharkhand" dated 09.03.2018.
- (iv) NEERI's acceptance of "TOR" vide email dated 08.05.2018

Dear Sir,

This has reference to proposal "Source Apportionment of ambient air particulate matter in Jharia coalfields region, Jharkhand" vide email dated 12.09.2016. The Competent Authority has approved the award of work to NEERI namely "Source Apportionment of ambient air particulate matter in Jharia coalfields region, Jharkhand" for One Crore forty one Lakh and sixty thousand only inclusive of GST( Rs. 1,41,60,000/-) for a period of Twelve(12) months under the MOU dated 03.12.2015 between CIL & NEERI, extended to all subsidiaries of CIL & the terms of reference. The Project-incharge will be HOD(Environment) or any of his authorized representative.

You are required to comply the scope, objective & terms and conditions in respect of above mentioned work as agreed in the "Terms of Reference" as given below.

#### 1. Scope of the Work:

 To conduct Source Apportionment Study for varying sources of gasses/smoke/dust emission from source to source (fuel wood, coal, fly-ash, TPPs, coke plants, traffic, silica from natural dust etc., but not limited to this) for the entire Jharia Coalfields (within and up to 10 Km from the periphery / boundary of BCCL mines)

- Study of Mineralogical composition of the suspended particulate matter (PM10 and PM2.5) with their characterization and quantification.
- Ascertaining sources(fuel wood, coal, fly-ash, TPPs, coke plants, traffic, silica from natural dust etc., but not limited to this) and extent of the air pollution of Jharia coalfield with suggesting cluster-wise appropriate techno-economically viable, mitigation management plan including action plan for the control of pollution level.
- The Environment Clearance has been granted to mines of BCCL on Cluster Basis, the final report must be submitted to BCCL on Cluster Basis. JCF has been divided into Clusters. The study to include the entire Jharia Coalfield along with area up to 10 Km from the periphery / boundary of BCCL mines (Key Plan showing Clusters in Jharia Coalfield enclosed)
- Two Presentations to be made by NEERI- One to BCCL Management before submission of Final report & another to the various stake holders including regulatory agencies after submission of the report.
- The dispersion Model should be on GIS platform
- The Hotspots/bottleneck points to be identified where there is increased pollution on GIS platform.
- Skill transfer and capacity building training for BCCL personnel.
- Accomodation, travel, local transport, other incidental cost and anciallary expenditures to be borne by NEERI.

#### 2. Objectives of the study:

The major objective of the study is to assess the current ambient air quality, sources of air pollution and propose the priorities for the actions for improvement of air quality. The study to include the entire Jharia Coalfield along with area up to 10 Km from the periphery / boundary of BCCL mines. The detailed objectives are as following;

#### A) Ambient Air Monitoring related

- Monitoring of ambient air quality at selected receptor locations for pollutants including PM10, PM 2.5(limited), SO2, NOx, PAHs to establish the current status of the air quality in Jharia Coalfields along with area up to 10 K.M from the periphery / boundary of BCCL mines. Also review of the available air quality monitoring data from Central Pollution Control Board(CPCB) /Jharkhand State Pollution Control Board(JSPCB).
- To calibrate dispersion modelling predictions using measured air quality parameters
- To draw supportive data through specific site related monitoring regarding impact causing sources such as kerbside monitoring.
- To establish the impact of meteorological conditions on a few select indicator pollutants in different micro meteorological conditions of the Jharia Coalfileds.
- B) Emission Inventory related of Jharia Coalfields along with area up to 10 Km from the periphery / boundary of BCCL mines

#### WATER QUALITY MONITORING

#### 3.1 Location of sampling sites

(Refer Plate No. – II)

Mine Discharge of East Basseriya (MW6)

A sampling point is fixed to assess the effluent quality of Mine discharge. This location is selected to monitor effluent discharge in to Ekra Nala.

#### 3.2 Methodology of sampling and analysis

Water samples were collected as per standard practice. The effluent samples were collected and analyzed for four parameters on fortnightly basis at the Environmental Laboratory of CMPDI RI-II, Dhanbad.

#### 3.3 **Results & Interpretations**

The results are given in tabular form along with the applicable standards. Results are compared with Schedule - VI, effluent prescribed by MoEF&CC. Results show that most of the parameters are within the permissible limits.

### **WATER QUALITY DATA**

#### (EFFLUENT WATER- FOUR PARAMETERS)

N	ame of the Cluster: Cluster -VI	Month: MAR 2021	Name of the Station: Mine Discharge of East Basseriya						
SI. No.	Parameters	MW6 First Fortnight	MW6 Second Fortnight	As per MOEF Genera Standards for					
		15.03.2021	30.03.2021	schedule VI					
1	Total Suspended Solids	36	52	100 (Max)					
2	рН	7.92	8.04	5.5 - 9.0					
3	Oil & Grease	<2.0	<2.0	10 (Max)					
4	COD	28	24	250 (Max)					

All values are expressed in mg/lit except pH.





Approved By HOD(In-charge) Environment RI-2, CMPDI, Dhanbad

#### WATER QUALITY MONITORING

#### 3.1 Location of sampling sites

(Refer Plate No. – II)

Mine Discharge of East Basseriya (MW6)

A sampling point is fixed to assess the effluent quality of Mine discharge. This location is selected to monitor effluent discharge in to Ekra Nala.

#### 3.2 Methodology of sampling and analysis

Water samples were collected as per standard practice. The effluent samples were collected and analyzed for four parameters on fortnightly basis at the Environmental Laboratory of CMPDI RI-II, Dhanbad.

#### 3.3 Results & Interpretations

The results are given in tabular form along with the applicable standards. Results are compared with Schedule - VI, effluent prescribed by MoEF&CC. Results show that most of the parameters are within the permissible limits.

#### WATER QUALITY DATA

#### (EFFLUENT WATER- FOUR PARAMETERS)

Name of the Cluster:		Month:	Name of the Station: Mine Discharge of	
Cluster -VI		FEB 2021	East Basseriya	
SI. No.	Parameters	MW6 First Fortnight	MW6 Second Fortnight	As per MOEF Genera Standards for
		09.02.2021	26.02.2021	schedule VI
1	Total Suspended Solids	35	31	100 (Max)
2	рН	8.02	7.94	5.5 - 9.0
3	Oil & Grease	<2.0	<2.0	10 (Max)
4	COD	20	16	250 (Max)

All values are expressed in mg/lit except pH.



Checked By Lab In Charge RI-2, CMPDI, Dhanbad

Approved By HOD(In-charge) Environment RI-2, CMPDI, Dhanbad

#### 3.1 Location of sampling sites

(Refer Plate No. - II)

Mine Discharge of East Basseriya (MW6)

A sampling point is fixed to assess the effluent quality of Mine discharge. This location is selected to monitor effluent discharge in to Ekra Nala.

#### 3.2 Methodology of sampling and analysis

Water samples were collected as per standard practice. The effluent samples were collected and analyzed for four parameters on fortnightly basis at the Environmental Laboratory of CMPDI RI-II, Dhanbad.

#### 3.3 Results & Interpretations

The results are given in tabular form along with the applicable standards. Results are compared with Schedule - VI, effluent prescribed by MoEF&CC. Results show that most of the parameters are within the permissible limits.

#### WATER QUALITY DATA

#### (EFFLUENT WATER- FOUR PARAMETERS)

Name of the Cluster: Cluster -VI		Month: JAN 2021	Name of the Station: Mine Discharge of East Basseriya		
SI. No.	Parameters	MW6 First Fortnight	<b>MW6</b> Second Fortnight	As per MOEF General Standards for	
		11.01.2021	25.01.2021	schedule VI	
1	Total Suspended Solids	34	39	100 (Max)	
2	рН	8.14	8.05	5.5 - 9.0	
3	Oil & Grease	<2.0	<2.0	10 (Max)	
4	COD	20	20	250 (Max)	

All values are expressed in mg/lit except pH.





#### 3.1 Location of sampling sites

(Refer Plate No. – II)

Mine Discharge of East Basseriya (MW6)

A sampling point is fixed to assess the effluent quality of Mine discharge. This location is selected to monitor effluent discharge in to Ekra Nala.

#### 3.2 Methodology of sampling and analysis

Water samples were collected as per standard practice. The effluent samples were collected and analyzed for four parameters on fortnightly basis at the Environmental Laboratory of CMPDI RI-II, Dhanbad.

#### 3.3 **Results & Interpretations**


The results are given in tabular form along with the applicable standards. Results are compared with Schedule - VI, effluent prescribed by MoEF&CC. Results show that most of the parameters are within the permissible limits.

#### WATER QUALITY DATA

#### (EFFLUENT WATER- FOUR PARAMETERS)

Name of the Cluster: Cluster -VI		Month: DEC.2020	Name of the Station: Mine Discharge of East Basseriya		
SI. No.	Parameters	MW6 First Fortnight	MW6 Second Fortnight	As per MOEF General Standards for	
		14.12.2020	28.12.2020	schedule VI	
1	Total Suspended Solids	35	38	100 (Max)	
2	рН	8.05	8.1	5.5 - 9.0	
3	Oil & Grease	<2.0	<2.0	10 (Max)	
4	COD	28	24	250 (Max)	

All values are expressed in mg/lit except pH.





#### 3.1 Location of sampling sites

(Refer Plate No. – II)

Mine Discharge of East Basseriya (MW6)

A sampling point is fixed to assess the effluent quality of Mine discharge. This location is selected to monitor effluent discharge in to Ekra Nala.

#### 3.2 Methodology of sampling and analysis

Water samples were collected as per standard practice. The effluent samples were collected and analyzed for four parameters on fortnightly basis at the Environmental Laboratory of CMPDI RI-II, Dhanbad.

#### 3.3 **Results & Interpretations**

The results are given in tabular form along with the applicable standards. Results are compared with Schedule - VI, effluent prescribed by MoEF&CC. Results show that most of the parameters are within the permissible limits.

#### WATER QUALITY DATA

#### (EFFLUENT WATER- FOUR PARAMETERS)

N	ame of the Cluster: Cluster -VI	Month: NOV.2020	Name of the Station: Mine Discharge of East Basseriya		
SI. No.	Parameters	MW6 First Fortnight	MW6 Second Fortnight	As per MOEF General Standards for	
		02.11.2020	30.11.2020	schedule VI	
1	Total Suspended Solids	44	31	100 (Max)	
2	рН	7.52	8.1	5.5 - 9.0	
3	Oil & Grease	<2.0	<2.0	10 (Max)	
4	COD	40	32	250 (Max)	

All values are expressed in mg/lit except pH.





#### 3.1 Location of sampling sites

(Refer Plate No. – II)

Mine Discharge of East Basseriya (MW6)

A sampling point is fixed to assess the effluent quality of Mine discharge. This location is selected to monitor effluent discharge in to Ekra Nala.

#### 3.2 Methodology of sampling and analysis

Water samples were collected as per standard practice. The effluent samples were collected and analyzed for four parameters on fortnightly basis at the Environmental Laboratory of CMPDI RI-II, Dhanbad.

#### 3.3 Results & Interpretations

The results are given in tabular form along with the applicable standards. Results are compared with Schedule - VI, effluent prescribed by MoEF&CC. Results show that most of the parameters are within the permissible limits.

#### WATER QUALITY DATA

#### (EFFLUENT WATER- FOUR PARAMETERS)

Name of the Cluster: Cluster -VI		Month: OCT.2020	Name of the Station: Mine Discharge of East Basseriya		
SI. No.	Parameters	MW6 First Fortnight	MW6 Second Fortnight	As per MOEF General Standards for	
		05.10.2020	19.10.2020	schedule VI	
1	Total Suspended Solids	45	35	100 (Max)	
2	рН	7.38	7.45	5.5 - 9.0	
3	Oil & Grease	<2.0	<2.0	10 (Max)	
4	COD	36	40	250 (Max)	

All values are expressed in mg/lit except pH.





# Memorandum of Understanding

for

Utilization of mine water by villages situated near mines of CIL in command area of Central Coalfields Limited, Bharat Coking Coal Limited and Eastern Coalfields Limited in the State of Jharkhand

This Memorandum of Understanding "MoU" ("Agreement") is made on 30<sup>th</sup>day of October 2017at Ranchi

## By and Between

Government of Jharkhand (hereinafter referred to as "GoJ"), represented through Department of Industries, Mines & Geology and Department of Drinking Water & Sanitation, Government of Jharkhand having its office at Ranchi which expression shall, unless the context otherwise requires, includes its successors and assignees of the FIRST PART:

## And

Coal India Limited (hereinafter referred to as "CIL"), a Government of India Enterprise having its Registered Office at Coal Bhawan, Premise No-04 MAR, Plot No- AF-III, Action Area- 1A, Newtown, Rajarhat, Kolkata-700156 and represented by General Manager, Corporate Social Responsibility, which expression shall, unless repugnant to the context or meaning thereof, be deemed to include its successors, and permitted assignees of the SECOND PART;

The expressions GoJ and CIL shall hereinafter, as the context may admit or require, be individually referred to as the 'The Party' and collectively as 'the Parties'.

## Whereas:

- A. The Government of Jharkhand (GoJ) and Coal India Limited (CIL), both parties have agreed in principle to the objective of achieving the common goal of providing surplus water from suitable mines for use by habitations, located in the command area of subsidiaries of CIL in the state of Jharkhand for their various needs. These subsidiaries are Central Coalfields Limited (CCL), Bharat Coking Coal Limited (BCCL) and Eastern Coalfields Limited (ECL).
- B. Mine wateravailable in mine voids and from mine discharge in Central Coalfields Limited (CCL), Bharat Coking Coal Limited (BCCL) and Eastern Coalfields Limited (ECL), subsidiaries of CIL are presently supplied to several colonies of these subsidiary companies of CIL. At some places mine water is drawn by Department of Drinking Water & Sanitation and other agencies/ organizations of Government of Jharkhand. Surplus mine water available at other mines can be used by surrounding habitations for their various needs.
- C. Presently, about 25250 million gallon of water is estimated to be available in 88 opencast mine voids of CCL, and about 31million gallon/ day of water is estimated to be available as surplus/excess mine water discharge at 23 mine sites of BCCL and 07mine sites of ECL in State of Jharkhand . The list ofmines where water is available in mine voids in CCL and in mine water discharge in BCCL and ECLare enclosed at Annexure I, Annexure II, and Annexure III respectively.

- D. The Parties hereby agree, undertake and affirm as under:-
  - That sampling and analysis of quality of water available at variousmine sites(voids ormine discharge), to assess the suitability for potability, agricultural or other uses will be done by a third party having a recognized environmental laboratory andthe party will be selected by mutual consent between CIL(represented by its subsidiaries CCL, BCCL and ECL) and GoJ.
  - ii. The report of analysis of quality of water of various mine sites will be submitted by the selected third party to GoJ and CIL (represented by its subsidiaries CCL, BCCL and ECL).
  - iii. That cost of sampling and analysis of quality of water of various mine sites will be borne by CIL (represented by its subsidiaries CCL, BCCL and ECL).
  - iv. That CIL (represented by its subsidiaries CCL, BCCL and ECL) shall bear all initial cost for construction of civil works like foundation, platform and shed for installation of motor and pumps for drawal of water at identified mine sites.
- v. That Government of Jharkhand shall bear the cost of pumps, motors, associated power supply, pipelines and their installation at identified mine sitesfrom where water is to be drawn. The cost of running these facilities would be borne byGovernment of Jharkhand or community benefitted.
- vi. The construction, operation and maintenance cost for treatment and distribution facilities of water from identified mine sites will be borne by GoJ.

- vii. The list of mine sites where water is available in voids or as mine discharge are placed at Annexure I, Annexure II, and Annexure III for CCL, BCCL, and ECL respectively. The number of mine sites may increase / decrease in future. So modalities for pumping water from the additional sites will be same as laid down at serial no D (i) to D (vi).
- viii. In case of dispute, the matter shall be mutually resolved and either party will not be held responsible for non discharge of responsibility under this agreement.
- ix. In case of force majeure or an Act of God, preventing the parties from fulfilling part or all the obligations, both parties shall be exonerated from carrying out further action as per MoU until the force majeure no longer exists.
- The MoU will be in force for 30 (thirty) years. The MoU may be renewed as mutually agreed upon by CIL (represented by its subsidiaries CCL, BCCL and ECL) and GoJ beyond the mentioned period of MoU.
  - Provided further that in case dewatering is required to start coal production in national interest from these mines then the parties will sit together and mutually decide modalities for the same.
- xi. The sustainability of mine sites in respect of future availability of water will be assessed/ studied by CIL.
- xii. This MoU shall be in accordance with applicable Acts, Rules and Guidelines for coal mining including mine closure guidelines and shall not be in contravention with provisions made therein.

IN WITNESS THEREOF, both parties hereto have signed this MoU in two original copies in English on the date indicated above.

pre-	A 1		
ror	Coa	India	Limited

For Government of Jharkhand

Department of Industries, Mines & Geology

- Siddh Nath Singh, General Manager, CSR, Coal India Limited
- Aboobacker Siddique P., I.A.S.
   Mines Commissioner,
   Mines & Geology Department,
   Government of Jharkhand.

(.....

Drinking Water & Sanitation
Department

2. Ramesh kumar,
Engineer in Chief,
Drinking Water & Sanitation
Department, Government of
Jharkhand.

(.....)

Witness 1 (Soumman Singh)

Witness 1

Sonolus Hatustes

Witness 2

Witness 2



STRICTLY RESTRICTED
FOR COMPANY USE ONLY

#### **RESTRICTED**

The information given in this report is not to be communicated either directly or indirectly to the press or to any person not holding an official position in the CIL/Government.

# GROUNDWATER LEVEL & QUALITY REPORT FOR CLUSTER OF MINES, BCCL

(Assessment year - 2020-21)

[CLUSTER - I, II, III, IV, V, VI, VII, VIII, IX, X, XI, XIII, XIV, XV & XVI of Mines, BCCL]

JHARIA COALFIELD AND RANIGANJ COALFIELD (PART)

# For (BHARAT COKING COAL LIMITED)

(A Subsidiary of Coal India Limited)

**KOYLA BHAWAN (DHANBAD)** 

Prepared by
Hydrogeology Department
Exploration Division
CMPDI (HQ), Ranchi

**MARCH - 2021** 

Job no - 200419012

#### F. GROUND WATER LEVEL OF CLUSTER-VI

Cluster–VI consists of four coal mines; East Bassuriya opencast (OC), Bassuriya underground (UG), Gondudih Khas-Kusunda OC and Godhur Mixed Mines (OC and UG) of BCCL. This Cluster of mines is located in central part of Jharia Coalfield in Dhanbad district of Jharkhand. The life of the project works out more than 30 years considering annual target production of 7.631 MTPA (Toposheet no – 73 I/6).

The present leasehold area of Cluster-VI is 831.83 Ha. The area has a general undulating topography with general slope towards south. The RL varies from 180 m to 240 m AMSL. Ekra Jore, Kari Jore and their tributaries are controlling the drainage pattern of the area. The area comes under the watershed of Ekra Jore and Kari Jore.

Monitoring stations (**D-25 and D-30**) are located in the core zone of the mine area. Water level monitoring in these monitoring stations has done in the months of May'20, August'20, and Nov'20 and January'21, the Ground water level data enclosed in the table below:


SI	Well	Location					Water level (bgl in meters)							
No.	No.			2020-21			2019-20		2018-19					
	INO.		May	Aug	Nov	Jan	May	Aug	Nov	Jan	Feb	May	Aug	Nov
1	D25	Godhur	10.50	2.28	5.62	6.40	9.90	4.35	5.38	5.50	0.50	2.60	0.60	2.40
2	D30	Borkiboa	4.50	1.65	1.35	2.40	4.60	0.38	0.75	1.95	2.60	4.58	1.00	1.10
Aver	rage W	L (bgl)	7.50	1.97	3.49	4.40	7.25	2.37	3.07	3.73	1.55	3.59	0.80	1.75


#### LAST THREE-YEAR ASSESSMENT:

Pre-monsoon GW Level (m): Min -2.60 m Max -10.50 m Post-monsoon GW Level (m): Min -0.75 m Max -5.62 m

JOB NO - 200419012 Page 23

#### HYDROGRAPHS OF CLUSTER-VI

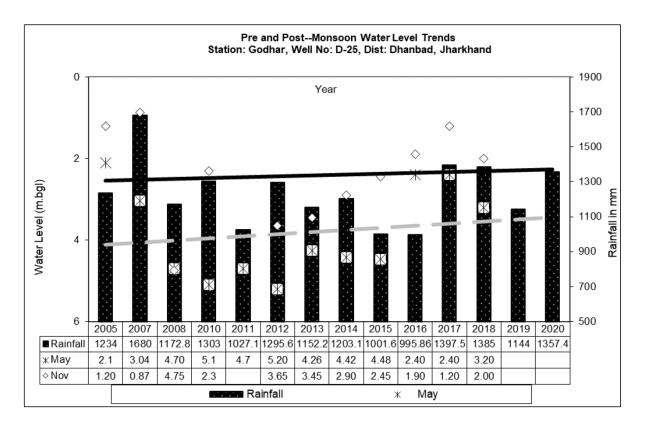

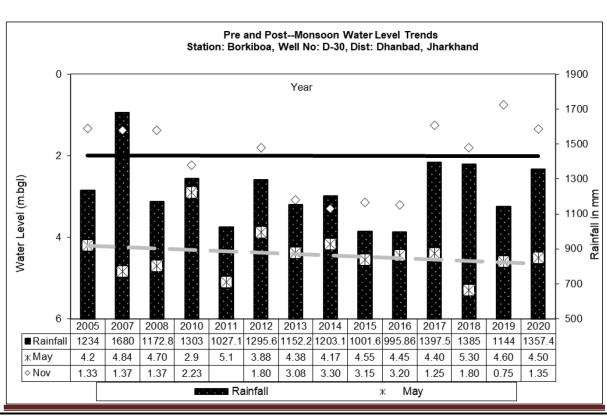



## भारतकोकिंगकोललिमिटेड

(कोलइंडियालिमिटेडकाएकअंग)

## BHARAT COKING COAL LIMITED

(A Subsidiary of Coal India Limited)

Civil Engineering Department, Koyla Nagar, Dhanbad – 826 005 (JH), India., e-mail: <a href="mailto:gmcivil.bccl@coalindia.in">gmcivil.bccl@coalindia.in</a>

NIT Ref. No.: BCCL/CED/TC/eNIT-18/2020-21/968

Date: 10.03.2021

## E – Tender Notice

Open E-Tender invited vide BCCL/CED/TC/eNIT-18/2020-21/968; Date: 10.03.2021 for the work of "Drilling and installation of 23 nos of piezometric wells in the command area of BCCL"

Estimated Value: Rs. 2,16,19,913.33 Period of Work:175 days

The tender documents can be downloaded from 11.03.2021to29.03.2021. All prospective bidders are advised to visit website <a href="https://coalindiatenders.nic.in">https://coalindiatenders.nic.in</a> for further details and to participate against this tender. Full details of this tender are also available on website "eprocure.gov.in".

..... for kind information

GM(Civil/Welfare), BCCL

Copy to:-

- 1) D(T) OP/D(P)/CVO, BCCL
- 2) GM (Civil/Ind.), BCCL.
- 3) GM All Area.
- 4) Chief Manager (Civil), CED HQ, BCCL.
- 5) GM (Geology)/HOD(Environment)/GM(P&P).
- 6) Area Manager (Civil), All Area
- 7) Assistant Manager (Civil), TC, CED.
- 8) IEMs.

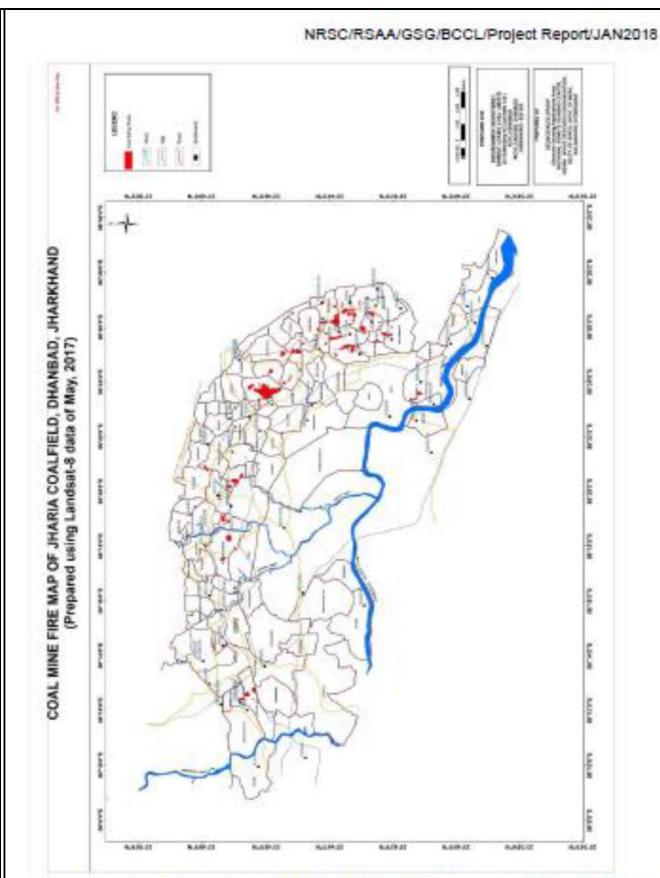


Figure 5: Coal mine fire map (May, 2017) of Jharia coal field, Dhanbad. The fire areas shown in this map have been verified in the field as per field points in figure 13.

## NRSC/RSAA/GSG/BCCL/Project Report/JAN2018

Note: Estimations of fire extent (in terms of sq.km.) both in 2012 and in the present 2017 study are pixel based. They do not represent the actual ground area under fire. These estimations are made for comparative purpose only, to indicate the increase or decrease of areal disposition of fire. Hence, they should not be quoted as fire area on the ground.

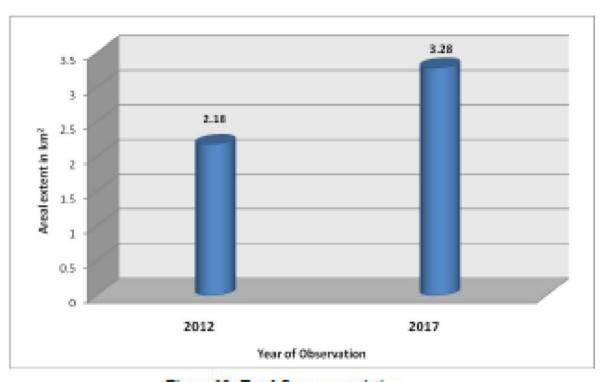


Figure 12: Total fire area statistics

#### Corporate Environmental Policy (http://www.bcclweb.in/environment/CEP 04.11.2019.pdf)

#### Item No. 351.3D

Quarterly Review for the Quarter October to December, 2018 & January to March, 2019 on Safety, Environment & Quality as per the directive of MoC letter no. 23/3/2015-ASO/BA dated 26.04.2017.

Board reviewed the quarterly report of October to December 2018 and January to March 2019 on Safety, Environment & Quality as per the directive of MoC letter no. 23/3/2015-ASO/BA dated 26.04.2017.

## Item No. 351.4G Corporate Environment Policy (CEP) of Bharat Coking Coal Limited.

#### Background

Coal India Ltd. had brought out its Corporate Environment Policy (CEP) in 2012 Based on CIL Environment Policy 2012, incorporating the Jharia Master Plan, CEP of BCCL was approved by 285<sup>th</sup> BCCL board on 21.04.2012 (ANNEXURE C of the agenda note). As per the provisions of the policy, it is to be revised every 05 years as per which the policy would have been revised in 2017. However, there was delay in revising the policy at CIL's end due to which there is a delay in revising BCCL's CEP. CIL has revised its Corporate Environment Policy and approved in its 377<sup>th</sup> CIL Board Meeting dated 20<sup>th</sup> Dec., 2018(ANNEXURE D of the agenda note).

The CAG during its exit meeting held on 16.11.2018 also pointed out for the need of revising BCCL's Corporate Environment Policy adopted in 2012 (ANNEXURE E of the agenda note). Modifying CIL's CEP to suit BCCL's prevailing conditions, the Corporate Environment Policy of BCCL has been revised.

Two versions of Policy was attached herewith out of which any one may be approved as deemed suitable by the Board.

- a. An abridged version of the policy as adopted earlier by BCCL in 2012. (ANNEXURE A of the agenda note)
- b. A detailed version of the policy similar to the CEP, 2018 of CIL with modifications suited to BCCL's condition. (ANNEXURE B of the agenda note)

#### Decision

After detailed deliberation the Corporate Environment Policy, 2018 of CIL was approved by the Board.

Board further directed that the Policy as adopted above to suit the conditions in BCCL should be modified with information to Coal India.

Certified to be True Copy


Company Secretary
Printed Coking Coal Limited

E6005

#### **AMBIENT AIR QUALITY DATA**


Cluster – VI, Bharat Coking Coal limited Month: MAR 2021 Year: 2020-21.

	Name: A9 – Basseriya Managers Office	Zone	e: Core	Category: Industrial		
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>	
1	15.03.2021	142	76	10	25	
2	26.03.2021	124	69	<10	31	
	NAAQ Standard	100	60	80	80	

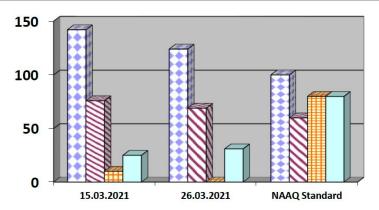

☐ PM 10 ☐ PM 2.5 ☐ SO2 ☐ NOx

Statio	n Name: A8 – Nichitpur	Zone: E	Buffer	Category: Industrial		
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>	
1	15.03.2021	127	69	11	32	
2	26.03.2021	96	52	<10	26	
	NAAQ Standard	100	60	80	80	

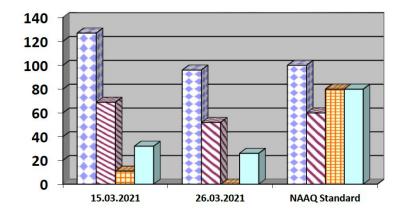


□ PM 10 ☑ PM 2.5 Ⅲ SO2 □ NOx






Station Name: A10 – Kusunda OCP		Zone:	Buffer	Category: Industrial		
SI. No.	. No. Dates of sampling		PM 2.5	SO2	NOx	
1	03.03.2021	142	75	12	39	
2	17.03.2021	128	70	13	32	
	NAAQ Standards	100	60	80	80	

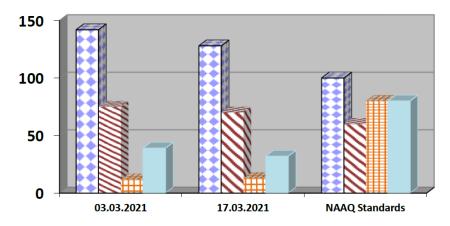



Station Name: A16 Pootki Balihari Office		Zone:	Buffer	Category: Industrial		
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx	
1	02.03.2021	121	66	<10	36	
2	18.03.2021	97	56	10	30	
	NAAQ Standards	100	60	80	80	

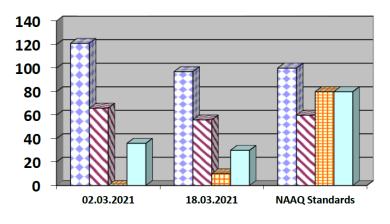

- ☐ PM 10 ☐ PM 2.5 ☐ SO2 ☐ NOx
- > All values are expressed in microgram per cubic meter.
- > 24 hours duration






Approved By HOD(In-charge) Environment RI-2, CMPDI, Dhanbad

कारिके त

#### **AMBIENT AIR QUALITY DATA**

Cluster - VI, Bharat Coking Coal limited Month: FEB 2021


Station Name: A9 – Basseriya Managers Office		Zone	e: Core	Category: Industrial		
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>	
1	10.02.2021	128	72	9	25	
2	26.02.2021	144	79	10	23	
	NAAQ Standard	100	60	80	80	

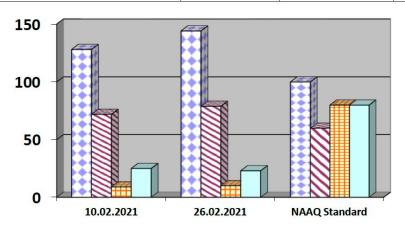

E	PM 10
	PM 2.5
E	SO2
ſ	NOx

Year: 2020-21.

Station Name: A8 – Nichitpur		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	10.02.2021	92	54	9	23
2	26.02.2021	96	55	10	25
	NAAQ Standard	100	60	80	80

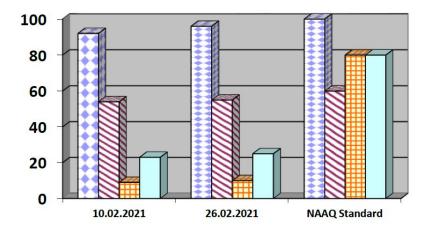



□ PM 10 □ PM 2.5 □ SO2 □ NOx






Station Name: A10 – Kusunda OCP		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	04.02.2021	123	65	14	40
2	26.02.2021	98	59	16	34
	NAAQ Standards	100	60	80	80

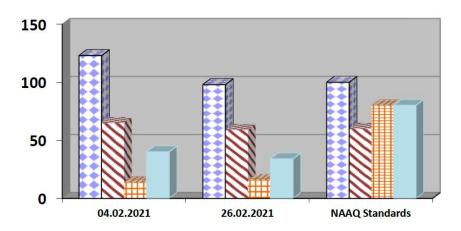



Station Name: A16 Pootki Balihari Office		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	11.02.2021	124	67	12	33
2	22.02.2021	136	70	12	36
	NAAQ Standards	100	60	80	80

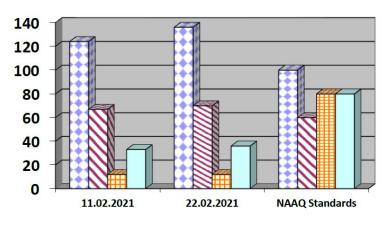

☐ PM 10 ☐ PM 2.5 ☐ SO2 ☐ NOx

- > All values are expressed in microgram per cubic meter.
- > 24 hours duration








#### AMBIENT AIR QUALITY DATA


Cluster – VI, Bharat Coking Coal limited Month: JAN 2021 Year: 2020-21.

Station Name: A9 – Basseriya Managers Office		Zone	e: Core	Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	15.01.21	96	52	10	22
2	29.01.21	111	68	9	22
	NAAQ Standard	100	60	80	80

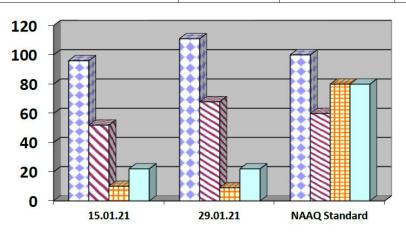

■ PM 10
☑ PM 2.5
<b>■ SO2</b>
□ NOx

Station Name: A8 - Nichitpur		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	15.01.21	94	50	10	23
2	29.01.21	97	54	11	26
	NAAQ Standard	100	60	80	80

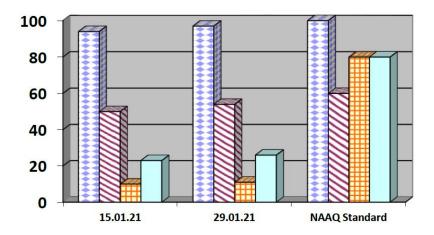

□ PM 10 ☑ PM 2.5 □ SO2 □ NOx






Approved By HOD(In-charge) Environment RI-2, CMPDI, Dhanbad


कारिके त

Station Name: A10 – Kusunda OCP		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	06.01.21	139	74	13	39
2	22.01.21	118	66	11	34
	NAAQ Standards	100	60	80	80

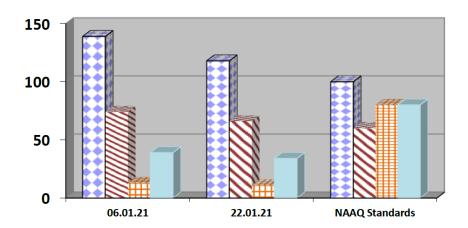

□ PM 10
≫ PM 2.5
<b></b> SO2
NOx

Station Name: A16 Pootki Balihari Office		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	04.01.21	141	79	10	32
2	18.01.21	127	71	12	28
	NAAQ Standards	100	60	80	80

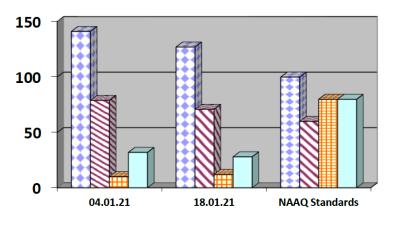


☐ PM 10 ☐ PM 2.5 ☐ SO2 ☐ NOx

- All values are expressed in microgram per cubic meter.
- > 24 hours duration








## **AMBIENT AIR QUALITY DATA**


Cluster – VI, Bharat Coking Coal limited Month: DEC 2020 Year: 2020-21.

Station Name: A9 – Basseriya Managers Office		Zone: Core		Category: Industrial	
SI. No.	Dates of sampling	PM 10 PM 2.5		SO <sub>2</sub>	NO <sub>X</sub>
1	01.12.2020	95	52	10	22
2	24.12.2020	128	71	12	23
	NAAQ Standard	100	60	80	80

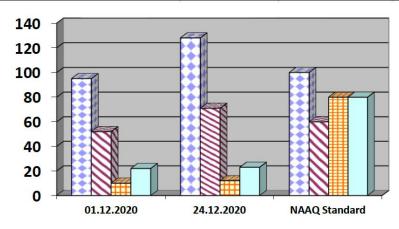



Station Name: A8 – Nichitpur		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	01.12.2020	124	72	11	24
2	24.12.2020	96	58	10	26
	NAAQ Standard	100	60	80	80

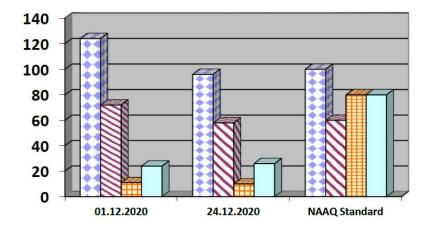









Station Name: A10 – Kusunda OCP		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	08.12.2020	144	75	14	36
2	21.12.2020	126	77	12	27
	NAAQ Standards	100	60	80	80

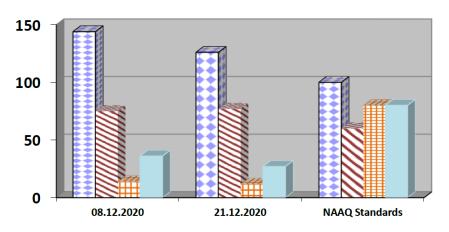

□ PM 10
≫ PM 2.5
<b># SO2</b>
■ NOx

Station Name: A16 Pootki Balihari Office		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	10.12.2020	97	53	12	23
2	29.12.2020	99	57	11	25
	NAAQ Standards	100	60	80	80

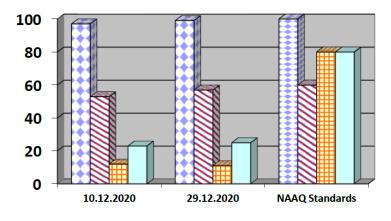

- ☐ PM 10 ☐ PM 2.5 ☐ SO2 ☐ NOx
- > All values are expressed in microgram per cubic meter.
- > 24 hours duration








#### **AMBIENT AIR QUALITY DATA**

Cluster - VI, Bharat Coking Coal limited Month: NOV 2020


Station Name: A9 – Basseriya Managers Office		Zone: Core		Category:	Industrial
SI. No.	Dates of sampling	PM 10 PM 2.5		so <sub>2</sub>	NO <sub>X</sub>
1	09.11.2020	98	57	10	22
2	23.11.2020	147	79	12	23
	NAAQ Standard	100	60	80	80

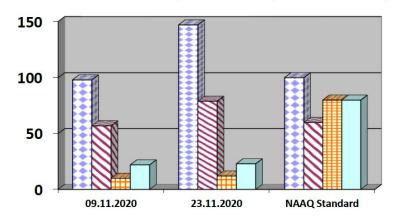

■ PM 10
☑ PM 2.5
<b>■ SO2</b>
□ NOx

Year: 2020-21.

Station Name: A8 – Nichitpur		Zone: E	Buffer	Category:	Industrial
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	09.11.2020	90	50	11	24
2	23.11.2020	95	54	10	26
	NAAQ Standard	100	60	80	80

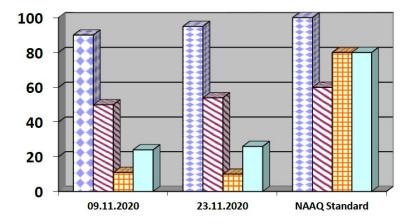










Station Name: A10 – Kusunda OCP		sunda OCP Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	12.11.2020	131	70	14	36
2	26.11.2020	126	68	12	27
	NAAQ Standards	100	60	80	80

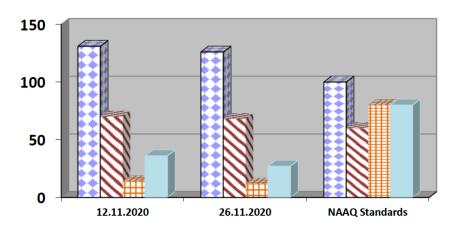



Station Name: A16 Pootki Balihari Office		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	13.11.2020	120	69	12	23
2	27.11.2020	96	57	11	25
	NAAQ Standards	100	60	80	80

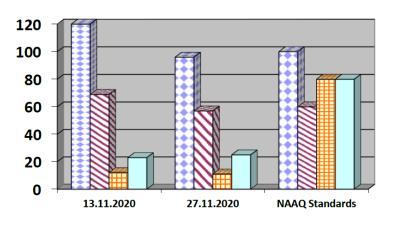

- □ PM 10 □ PM 2.5 □ SO2 □ NOx
- > All values are expressed in microgram per cubic meter.
- > 24 hours duration






#### **AMBIENT AIR QUALITY DATA**

Cluster – VI, Bharat Coking Coal limited Month: OCT 2020


Station Name: A9 – Basseriya Managers Office		Zone: Core		Category: Industria	
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	14.10.2020	123	79	12	26
2	27.10.2020	95	50	13	23
	NAAQ Standard	100	60	80	80

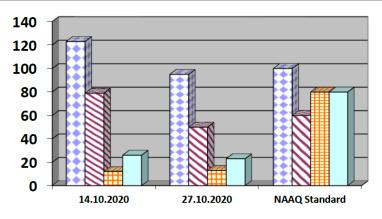

■ PM 10
☑ PM 2.5
<b>■ SO2</b>
□NOx

Year: 2020-21.

Station Name: A8 – Nichitpur		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	so <sub>2</sub>	NO <sub>X</sub>
1	15.10.2020	74	38	11	23
2	27.10.2020	93	45	11	21
	NAAQ Standard	100	60	80	80

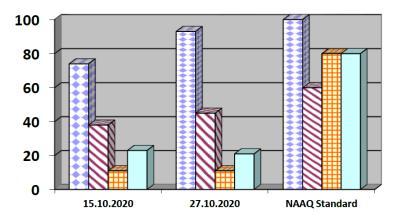



□ PM 10 □ PM 2.5 □ SO2 □ NOx






Station Name: A10 – Kusunda OCP		P Zone: Buffer		Category: Industrial	
SI. No.	SI. No. Dates of sampling		PM 2.5	SO2	NOx
1	15.10.2020	129	76	19	32
2	30.10.2020	135	87	18	28
	NAAQ Standards	100	60	80	80

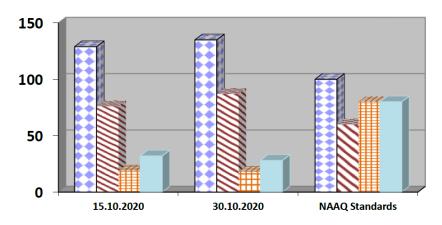



Station Name: A16 Pootki Balihari Office		Zone: Buffer		Category: Industrial	
SI. No.	Dates of sampling	PM 10	PM 2.5	SO2	NOx
1	14.10.2020	96	59	13	24
2	23.10.2020	129	67	14	22
	NAAQ Standards	100	60	80	80

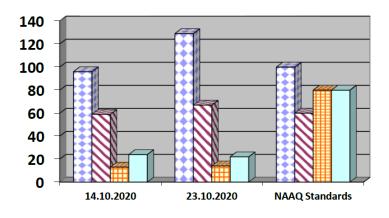

- ☐ PM 10 ☐ PM 2.5 ☐ SO2 ☐ NOx
- All values are expressed in microgram per cubic meter.
- > 24 hours duration





#### 4.1Location of sampling sites

- i) Basseriya Managers Office (N9)
- ii) Nichitpur (N8)
- iii) Kusunda OCP (N10)
- iv) Pootki Balihari Office (N16)

#### 4.2 Methodology of sampling and analysis

Noise level measurements in form of  $'L_{EQ}'$  were taken using Integrated Data Logging Sound Level Meter (NL-52 OF RION CO. Ltd. Make) during day time. Noise levels were measured for about one hour time in day time. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB (A).

#### 4.3 Results & Interpretations


Ambient noise levels were recorded during day time and the observed values were compared with standards prescribed by MoEF&CC. The results of Noise levels recorded during day time on fortnightly basis are presented in tabular form along with the applicable standard permissible limits. The observed values in terms of  $L_{EQ}$  are presented. The observed values at all the monitoring locations are found to be within permissible limits.

#### **NOISE LEVEL DATA**

Na	ame of the Project: Clu	ster -VI	Month: MAR 2021			
SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)	
1	Nichitpur (N8)	Industrial area	15.03.2021	57.2	75	
2	Nichitpur (N8)	Industrial area	26.03.2021	59.6	75	
3	Basseriya Managers Office (N9)	Industrial area	15.03.2021	59.3	75	
4	Basseriya Managers Office (N9)	Industrial area	26.03.2021	60.2	75	
5	Kusunda OCP (N10)	Industrial area	03.03.2021	63.5	75	
6	Kusunda OCP (N10)	Industrial area	17.03.2021	62.5	75	
7	Pootki Balihari Office (N16)	Industrial area	02.03.2021	59	75	
8	Pootki Balihari Office (N16)	Industrial area	18.03.2021	57.8	75	

<sup>\*</sup>Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control) Rules, 2000.

<sup>\*</sup> Day Time: 6.00 AM to 10.00 PM,





#### 4.1Location of sampling sites

- i) Basseriya Managers Office (N9)
- ii) Nichitpur (N8)
- iii) Kusunda OCP (N10)
- iv) Pootki Balihari Office (N16)

#### 4.2 Methodology of sampling and analysis

Noise level measurements in form of ' $L_{EQ}$ ' were taken using Integrated Data Logging Sound Level Meter (NL-52 OF RION CO. Ltd. Make) during day time. Noise levels were measured for about one hour time in day time. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB (A).

#### 4.3 Results & Interpretations


Ambient noise levels were recorded during day time and the observed values were compared with standards prescribed by MoEF&CC. The results of Noise levels recorded during day time on fortnightly basis are presented in tabular form along with the applicable standard permissible limits. The observed values in terms of  $L_{\text{EQ}}$  are presented. The observed values at all the monitoring locations are found to be within permissible limits.

#### **NOISE LEVEL DATA**

Na	ame of the Project: Clu	ster -VI	Month: FEB 2021				
SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)		
1	Nichitpur (N8)	Industrial area	10.02.2021	57.3	75		
2	Nichitpur (N8)	Industrial area	26.02.2021	56.9	75		
3	Basseriya Managers Office (N9)	Industrial area	10.02.2021	62.2	75		
4	Basseriya Managers Office (N9)	Industrial area	26.02.2021	63.4	75		
5	Kusunda OCP (N10)	Industrial area	04.02.2021	55.9	75		
6	Kusunda OCP (N10)	Industrial area	26.02.2021	56.3	75		
7	Pootki Balihari Office (N16)	Industrial area	11.02.2021	58.2	75		
8	Pootki Balihari Office (N16)	Industrial area	22.02.2021	58.6	75		

\*Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control) Rules, 2000.

\* Day Time: 6.00 AM to 10.00 PM,



Checked By Lab In Charge RI-2, CMPDI, Dhanbad

#### 4.1Location of sampling sites

- i) Basseriya Managers Office (N9)
- ii) Nichitpur (N8)
- iii) Kusunda OCP (N10)
- iv) Pootki Balihari Office (N16)

#### 4.2 Methodology of sampling and analysis

Noise level measurements in form of  $'L_{EQ}'$  were taken using Integrated Data Logging Sound Level Meter (NL-52 OF RION CO. Ltd. Make) during day time. Noise levels were measured for about one hour time in day time. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB (A).

#### 4.3 Results & Interpretations

Ambient noise levels were recorded during day time and the observed values were compared with standards prescribed by MoEF&CC. The results of Noise levels recorded during day time on fortnightly basis are presented in tabular form along with the applicable standard permissible limits. The observed values in terms of  $L_{EQ}$  are presented. The observed values at all the monitoring locations are found to be within permissible limits.

#### **NOISE LEVEL DATA**

Name of the Project: Cluster -VI			Month: JAN 2021				
SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)		
1	Nichitpur (N8)	Industrial area	15.01.21	57.4	75		
2	Nichitpur (N8)	Industrial area	29.01.21	56.3	75		
3	Basseriya Managers Office (N9)	Industrial area	15.01.21	61.6	75		
4	Basseriya Managers Office (N9)	Industrial area	29.01.21	62.2	75		
5	Kusunda OCP (N10)	Industrial area	06.01.21	65.4	75		
6	Kusunda OCP (N10)	Industrial area	22.01.21	61.6	75		
7	Pootki Balihari Office (N16)	Industrial area	04.01.21	57.8	75		
8	Pootki Balihari Office (N16)	Industrial area	18.01.21	56.8	75		

\*Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control) Rules, 2000. \* Day Time: 6.00 AM to 10.00 PM,



Checked By Lab In Charge RI-2, CMPDI, Dhanbad

#### 4.1Location of sampling sites

- i) Basseriya Managers Office (N9)
- ii) Nichitpur (N8)
- iii) Kusunda OCP (N10)
- iv) Pootki Balihari Office (N16)

#### 4.2 Methodology of sampling and analysis

Noise level measurements in form of  $'L_{EQ}'$  were taken using Integrated Data Logging Sound Level Meter (NL-52 OF RION CO. Ltd. Make) during day time. Noise levels were measured for about one hour time in day time. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB (A).

#### 4.3 Results & Interpretations

Ambient noise levels were recorded during day time and the observed values were compared with standards prescribed by MoEF&CC. The results of Noise levels recorded during day time on fortnightly basis are presented in tabular form along with the applicable standard permissible limits. The observed values in terms of  $L_{EQ}$  are presented. The observed values at all the monitoring locations are found to be within permissible limits.

#### NOISE LEVEL DATA

Na	ame of the Project: Clu	ster -VI	Month: DEC.2020				
SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)		
1	Nichitpur (N8)	Industrial area	01.12.2020	56.8	75		
2	Nichitpur (N8)	Industrial area	24.12.2020	55.5	75		
3	Basseriya Managers Office (N9)	Industrial area	01.12.2020	63.2	75		
4	Basseriya Managers Office (N9)	Industrial area	24.12.2020	62.3	75		
5	Kusunda OCP (N10)	Industrial area	08.12.2020	54.1	75		
6	Kusunda OCP (N10)	Industrial area	21.12.2020	58.1	75		
7	Pootki Balihari Office (N16)	Industrial area	10.12.2020	59.7	75		
8	Pootki Balihari Office (N16)	Industrial area	29.12.2020	57.6	75		

<sup>\*</sup>Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control) Rules, 2000.

<sup>\*</sup> Day Time: 6.00 AM to 10.00 PM,



Checked By Lab In Charge RI-2, CMPDI, Dhanbad

Approved By HOD(In-charge) Environment RI-2, CMPDI, Dhanbad

asta a

#### 4.1Location of sampling sites

- i) Basseriya Managers Office (N9)
- ii) Nichitpur (N8)
- iii) Kusunda OCP (N10)
- iv) Pootki Balihari Office (N16)

#### 4.2 Methodology of sampling and analysis

Noise level measurements in form of  $'L_{EQ}'$  were taken using Integrated Data Logging Sound Level Meter (NL-52 OF RION CO. Ltd. Make) during day time. Noise levels were measured for about one hour time in day time. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB (A).

#### 4.3 Results & Interpretations

Ambient noise levels were recorded during day time and the observed values were compared with standards prescribed by MoEF&CC. The results of Noise levels recorded during day time on fortnightly basis are presented in tabular form along with the applicable standard permissible limits. The observed values in terms of  $L_{\text{EQ}}$  are presented. The observed values at all the monitoring locations are found to be within permissible limits.

#### **NOISE LEVEL DATA**

Na	ame of the Project: Clu	ster -VI	Month: <b>NOV.2020</b>				
SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)		
1	Nichitpur (N8)	Industrial area	09.11.2020	58.2	75		
2	Nichitpur (N8)	Industrial area	23.11.2020	62.9	75		
3	Basseriya Managers Office (N9)	Industrial area	09.11.2020	64.1	75 75		
4	Basseriya Managers Office (N9)	Industrial area	23.11.2020	61.8			
5	Kusunda OCP (N10)	Industrial area	12.11.2020	57.7	75		
6	Kusunda OCP (N10)	Industrial area	26.11.2020	66.1	75		
7	Pootki Balihari Office (N16)	Industrial area	13.11.2020	58.1	75		
8	Pootki Balihari Office (N16)	Industrial area	27.11.2020	55.7	75		

\*Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control) Rules, 2000.

\* Day Time: 6.00 AM to 10.00 PM,





#### 4.1Location of sampling sites

- i) Basseriya Managers Office (N9)
- ii) Nichitpur (N8)
- iii) Kusunda OCP (N10)
- iv) Pootki Balihari Office (N16)

#### 4.2 Methodology of sampling and analysis

Noise level measurements in form of  $'L_{EQ}'$  were taken using Integrated Data Logging Sound Level Meter (NL-52 OF RION CO. Ltd. Make) during day time. Noise levels were measured for about one hour time in day time. Noise levels were measured in Decibels, 'A' weighted average, i.e. dB (A).

#### 4.3 Results & Interpretations

Ambient noise levels were recorded during day time and the observed values were compared with standards prescribed by MoEF&CC. The results of Noise levels recorded during day time on fortnightly basis are presented in tabular form along with the applicable standard permissible limits. The observed values in terms of  $L_{\text{EQ}}$  are presented. The observed values at all the monitoring locations are found to be within permissible limits.

#### **NOISE LEVEL DATA**

Name of the Project: Cluster -VI			Month: OCT.2020				
SI. No.	Station Name/Code	Category of area	Date	Noise level dB(A)LEQ	*Permissible Limit of Noise level in dB(A)		
1	Nichitpur (N8)	Industrial area	15.10.2020	58.2	75		
2	Nichitpur (N8)	Industrial area	27.10.2020	62.9	75		
3	Basseriya Managers Office (N9)	Industrial area	14.10.2020	64.1	75		
4	Basseriya Managers Office (N9)	Industrial area	27.10.2020	61.8	75		
5	Kusunda OCP (N10)	Industrial area	15.10.2020	57.7	75		
6	Kusunda OCP (N10)	Industrial area	30.10.2020	66.1	75		
7	Pootki Balihari Office (N16)	Industrial area	14.10.2020	58.1	75		
8	Pootki Balihari Office (N16)	Industrial area	23.10.2020	55.7	75		

\*Permissible limits of Noise Level as per MOEF Gazette Notification No. GSR 742(E) dt. 25.09.2000 Standards for Coal Mines and Noise Pollution (Regulation and Control) Rules, 2000.

\* Day Time: 6.00 AM to 10.00 PM,



Checked By Lab In Charge RI-2, CMPDI, Dhanbad Approved By HOD(In-charge) Environment RI-2, CMPDI, Dhanbad

as tab a

#### POLLUTION UNDER CONTROL CERTIFICATE

Authorised By:

Transport Department, Government of Jharkhand



**TEST RESULT: PASS** VALID TILL: 24/Sep/2021

Certificate \$1. No

Registration No

Owner Name

Chassis No.

Engine No

Make

Mode

Vehicle Category

Emission North

Fuel:

Date of Testing:

PUC Equipment

Manufacturer Name

PUC Equipment

Manufacturer Model

PUC Equipment Serial

No.

JH01000670000127

JH10AR6902

SURESH RAM

MAT448062E3J\*\*\*\*\*

B591803241J633\*\*\*\*\*

Goods Carrier TATA MOTORS LTD

LPK2518

HEAVY GOODS VEHICLE

13/Oct/2014

BHARAT STAGE III

DIESEL

25/Mar/2021

**IBSYS** 

ECM1601

00451

Fee Charged

Rs.300.0

only)

In case of any complain Please write to Transport Commissioner Jharkhand



DIESEL DRIVEN VEHICLES

Certified that the vehicle conforms to the standards prescribed under rule 115(2) of CMV Rules 1989

Light Absorption Coefficient FUEL (Permissible Limit)

Value

2.45

0.16267


Auto Emission Testing Centre Code: 10:49:33 JH0100067

Testing Centre Name: HILL VIEW

FILLING STATION

(three hundred rupees Centre Address: GODHAR, KUSUNDA, DHANBAD, 828116

Test Conducted By: SANTOSH KUMAR GUPTA



TEST RESULT FOR DIESEL VEHICLE

1 10 1 10 10 10 10 10 10 10 10 10 10 10	IDLE RPM	MAX RPM	K_VALUE	OIL TEMP
TESTIQ	642.0	2782.0	0.252	27.0
TESTIZ I	682.0	2833.0	0.118	27.0
TEST B	691.0	2797.0	0.118	27.0
HI WATER IN	671.66667	2804.0	0.16267	27.0

This is a computer generated certificate and does not require signature

## POLLUTION UNDER CONTROL CERTIFICATE

Authorised By:

Transport Department, Government of Jharkhand



Measured

Matur

0.21067

TEST RESULT : PASS VALID TILL: 12/Sep/2021

DIESEL DRIVEN VEHICLES

Certified that the vehicle conforms to the standards

prescribed under rule \$15(2) of CMV Rules 1989

Light Absorption Coefficient

(Permissible Limit)

1.62

Certificate 84.No.:

3H01000670000030

Regulation No.:

3H10BL7375

Owner Name

DHANESHWAR MONDAL

Chassis No.

MAT4482363AA03532

Engris No.:

#1A84445122

Class of Vehicle

Goods Carrier TATA MOTORS LTD

Mana:

50649638000R

Model

HEAVY GODDS

White Calably

VEHICLE

Date of Reputati

05/Mar/2018 BHARAT STAGE IV

Emossion faprills

DIESEL

Friet:

Date of Tealing

13/Sep/2020

**PUC Equipment** 

13595

Manufacturer Name

Time of Testing.

Fee Charged:

Fee Charged:

**PUC Equipment** 

Manufacturer Model

ECM1601

Name

PUC Equipment Serial

C0451

No.



FUEL.

DIESEL

Auto Emission Testing Centre Code:

1000067

Testing Centre Name: HILL VIEW FILLING STATION

15:07:28

Rs.300.0

Centre Address: GODHAR, KUSUNDA, DHANBAD, 828116 (three hundred rupees


only)

Test Conducted By: SANTOSH KUMAR

in case of any complain Please write to Transport

Commissioner thankhand

GUPTA



	112	TEST REDUCE FOR DISCUSSION		O'L TEMP	
	IDLE RPM	MAX RPM	0.259	27.0	
acces 1	728.0	1750.0		27.0	
TEST I	929.0	1747.0	0.259		
TEST 2	The second secon	1761,0	0.114	27.0	
TEST 3	892.0	A LANGUAGE CONTRACTOR OF THE PARTY OF THE PA	0.21067	27.0	
ANIES.	849.66667	1759.33334	0.000	1	

SI. No.	Name of Area/ Mine/ Office	October	November	December	January	February*	March*
1	NGKC	40	45	74	33	0	0
2	GKKC	24	18	27	18	0	0
3	EBC	0	0	0	7	0	0
	Total		63	101	58	0	0

\*(PME abandoned temporalily due to COVID-19 upsurge)



Picture 1 - Covered Transportation



Picture 2 – Water Sprinkling on Transportation Road



Picture 3 - Stone Pitching/embankment at Kari Jore



Picture 4 - Eco-restoration at GKKC



Picture 5 – Oil & Grease Trap